


## Specification Sheet

Part Number: 553-60001

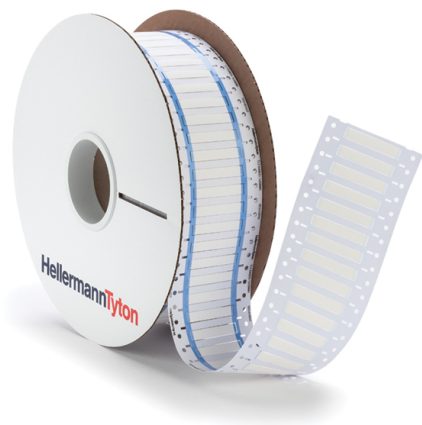

Halogen free, for low smoke propagation, density and toxicity.  
50 mm, 25 mm and 16 mm pre-cut marker options as standard, for ability to get multiple labels out of one tag.

Delivery in convenient storage boxes for protection.

ShrinkTrak Labels, 2-Sided, Unslit, Halogen Free, 1.97" x .24", Polyolefin, White, 5000/pkg

<b>Article Number</b>	553-60001
<b>Type</b>	TLFX32DS-1x50WH
<b>Color</b>	White (WH)
<b>Quantity Per</b>	pack

<b>Product Description</b>	ShrinkTrak DS is a halogen-free, double-sided heat shrinkable marker with a 2:1 shrink ratio. HellermannTyton's unique ladder-style design assists in removing markers off the carrier. The side slits have been designed to ensure the wire entry gap is as large as possible while remaining on the carrier strip, enabling the user to quickly insert wire and cable into the marker. For a complete labeling solution, ShrinkTrak DS can be printed using HellermannTyton's TagPrint® Pro professional label creation software and thermal transfer printers. For double-sided printing, HellermannTyton's TrakMark DS double-sided printer produces excellent results. Choose among multiple ribbon types to create a permanent print that resists most solvents when shrunk and applied.
<b>Short Description</b>	ShrinkTrak Labels, 2-Sided, Unslit, Halogen Free, 1.97" x .24", Polyolefin, White, 5000/pkg
<b>Global Part Name</b>	TLFX32DS-1x50WH-PO-X-WH
<b>Length L (Imperial)</b>	2.0
<b>Length L (Metric)</b>	50.0
<b>Fixation Method</b>	Others
<b>Variant</b>	Thin-Wall
<b>Width W (Imperial)</b>	2.0
<b>Width W (Metric)</b>	50.0
<b>Thickness T (Imperial)</b>	.0130
<b>Thickness T (Metric)</b>	.29
<b>Height H (Imperial)</b>	0.23

<b>Height H (Metric)</b>	6.0
<b>Width of Liner (Metric)</b>	88.9
<b>Width of Liner (Imperial)</b>	3.50
<b>Outside Diameter Max (Imperial)</b>	0.12
<b>Outside Diameter Max (Metric)</b>	3.04
<b>Wall Thickness WT (Imperial)</b>	0.025
<b>Wall Thickness WT (Metric)</b>	0.635
<b>Material</b>	Polyolefin, cross-linked (PO-X)
<b>Material Shortcut</b>	PO-X
<b>US MIL SPEC</b>	MIL-STD-202J SAE AS5942 3.4.1
<b>Flammability</b>	Low generation of toxic gases and corrosive acid Limited fire hazard UL 224 Halogen-free Low smoke generation
<b>Halogen Free</b>	Yes
<b>Operating Temperature</b>	-67°F to +221°F (-55°C to +105°C)
<b>Reach Compliant (Article 33)</b>	Yes

<b>ROHS Compliant</b>	Yes
<b>Certification/Specification</b>	DIN EN [45545-2] ASTM 1354 ASTM E 162 ASTM E 662 Exova   NFPA130: 2017
<b>Package Quantity (Imperial)</b>	5000
<b>Package Quantity (Metric)</b>	5000
<b>Customs Number</b>	3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)