

Screwdriver - SF-SL 0,8X4,0-100 S-VDE - 1212588

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Your advantages

- ✓ VDE-tested, for maximum safety
- ✓ In addition to standard applications, SF-SL ... screwdrivers are particularly suitable for modular terminal block assembly
- ✓ Because the insulation runs into the shaft, there is no protruding edge

Key Commercial Data

Packing unit	10 pc
GTIN	 4 046356 590235
GTIN	4046356590235

Technical data

Dimensions

Length (b)	198 mm
Width (a)	33 mm
Blade thickness	0.8 mm
Blade width	4 mm
Blade height	100 mm
Wrench size	0 mm

General

Type	Bladed
	straight
Material	alloyed tool steel
Test standard	DIN/ISO 2380-1 IEC 60900:2004

Standards and Regulations

Test standard	DIN/ISO 2380-1 IEC 60900:2004
---------------	-------------------------------

Environmental Product Compliance

Screwdriver - SF-SL 0,8X4,0-100 S-VDE - 1212588


Technical data

Environmental Product Compliance

California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
---------------------------	---


Drawings

Pictogram

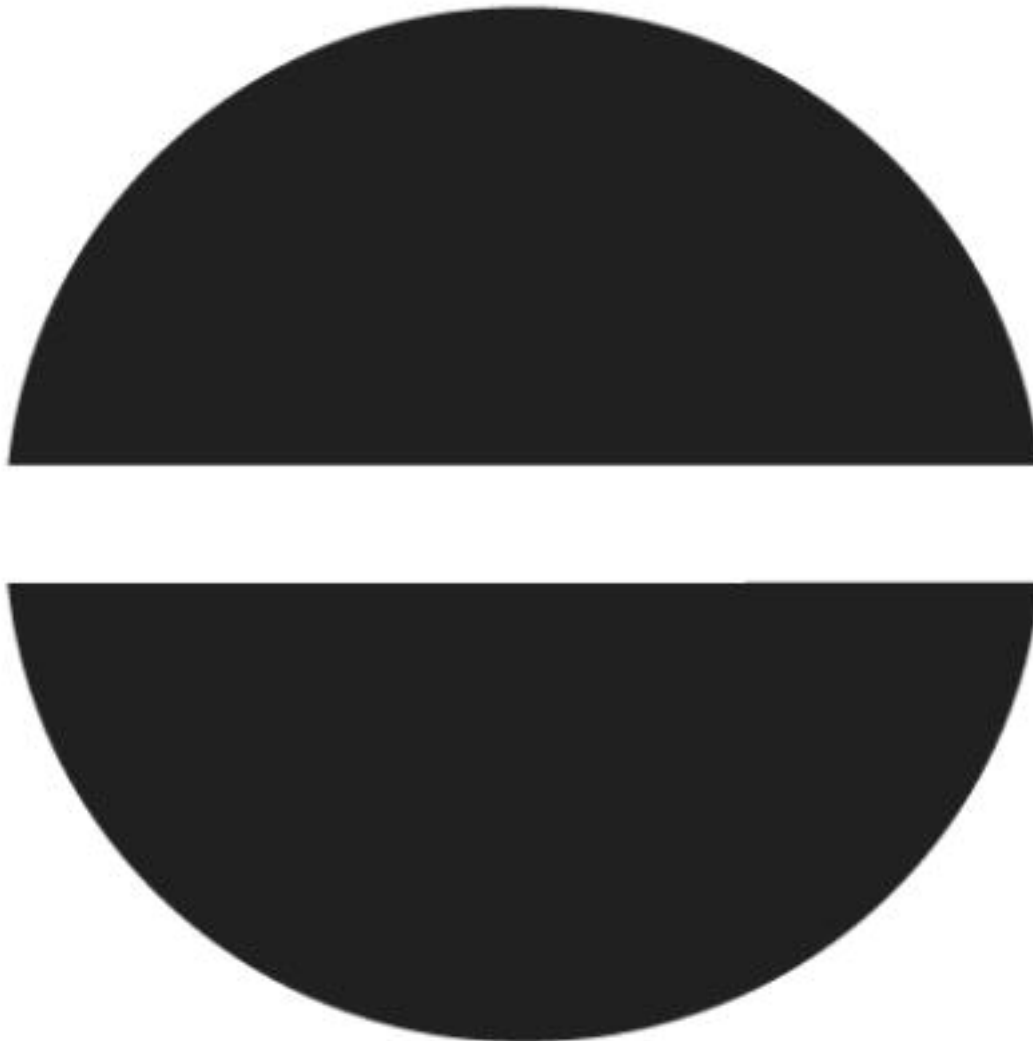

Screwdriver - SF-SL 0,8X4,0-100 S-VDE - 1212588

Dimensional drawing

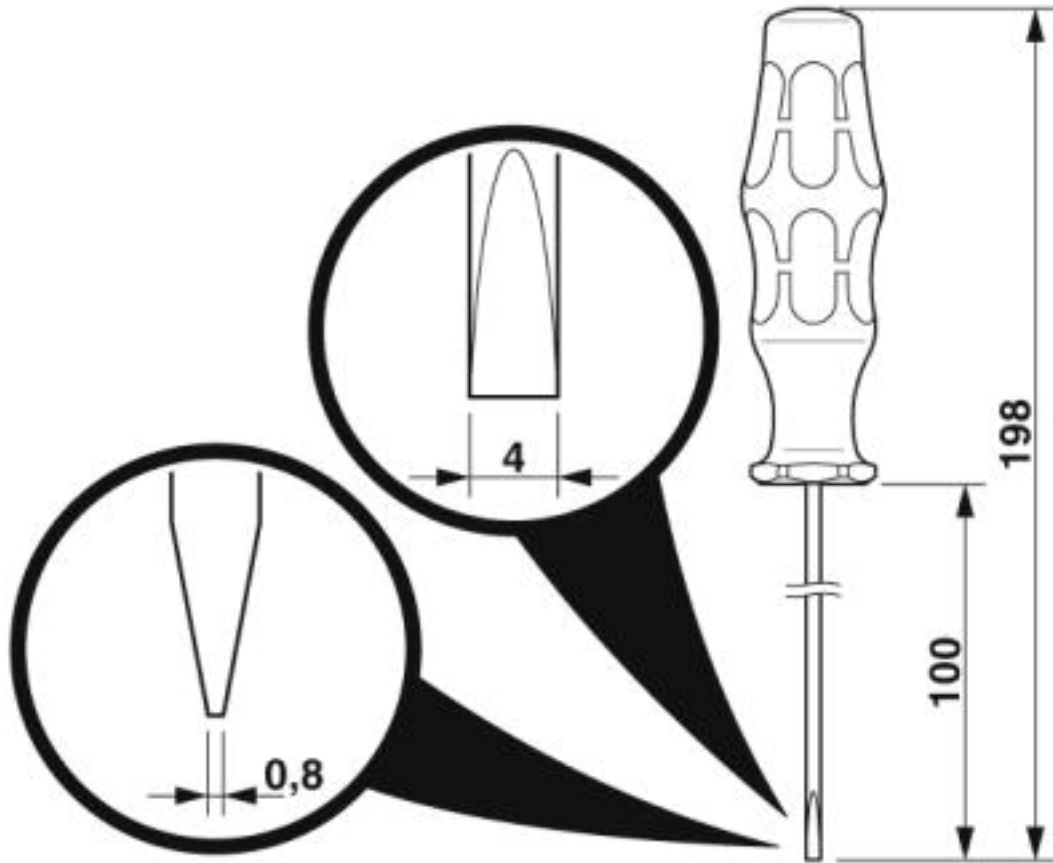

Approvals

Approvals

Approvals

VDE Zeichengenehmigung / EAC

Ex Approvals

Approval details

VDE Zeichengenehmigung



<http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx>

40032921

Screwdriver - SF-SL 0,8X4,0-100 S-VDE - 1212588

Approvals

EAC



RU C-
DE.AI30.B.01750

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>