

STRADA-SQ-A-T

Short IESNA Type II beam for narrow roads or high poles with extremely low glare. Assembly with installation tape. Optimized for CREE XM-L.


TECHNICAL SPECIFICATIONS:

Dimensions	25.0 mm
Height	9.2 mm
Fastening	screw, tape
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	9.9 kg
Quantity in Box	2058 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-SQ-A-T	Single lens	PMMA	clear
ROSE-TAPE	Tape	PU tape	black

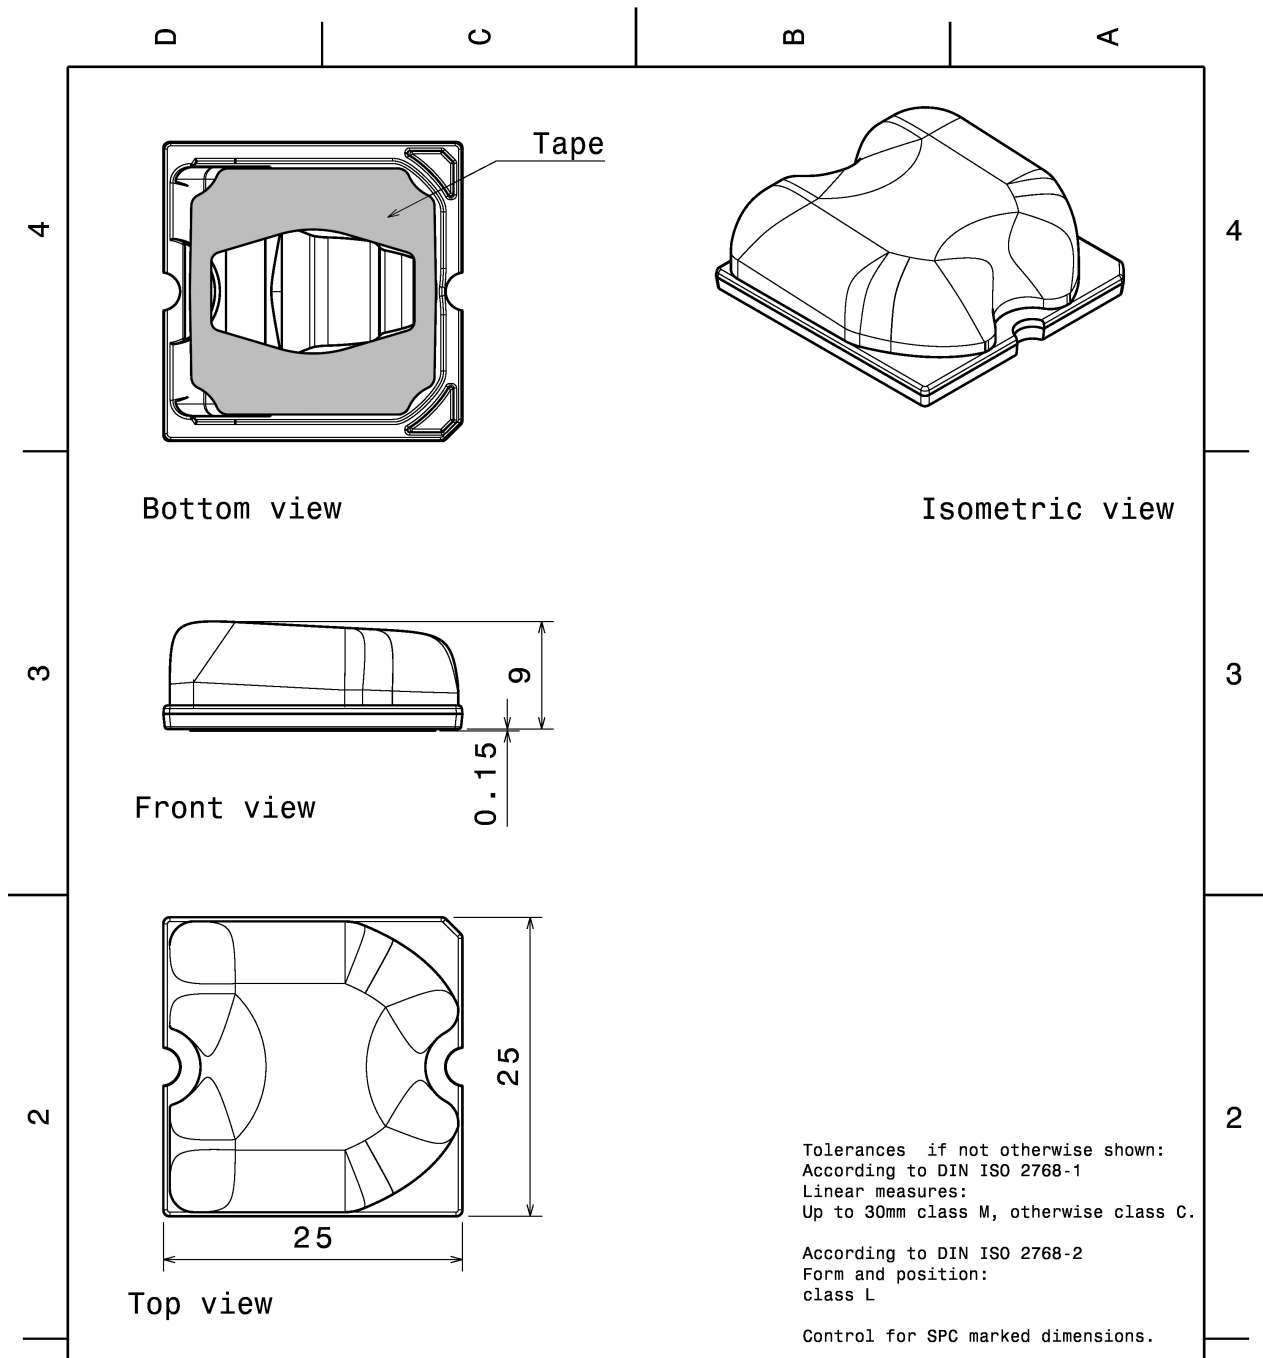


This drawing is our property. It can't be reproduced or communicated without our written agreement.		LEDiL Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
DRAWING TITLE		Mechanical drawing	
DRAWN BY	DATE	STRADA-SQ-A-T	
as	25.9.2012		
CHECKED BY	DATE	SIZE	PART NUMBER
VS	-	A4	REV
DESIGNED BY	DATE	SCALE	WEIGHT
-	-	2:1	4,97 g
		SHEET	1/1

PHOTOMETRIC DATA (MEASURED):


CREE

LED XHP50
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

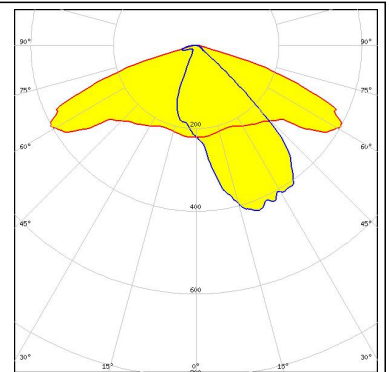


CREE

LED XM-L
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.510 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

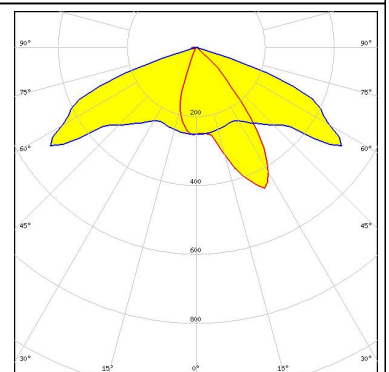


CREE

LED XM-L2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

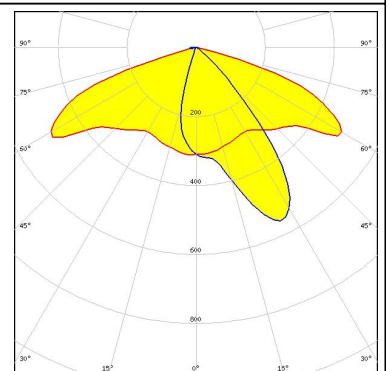

LUMILEDS


LED LUXEON M/MX
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.410 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

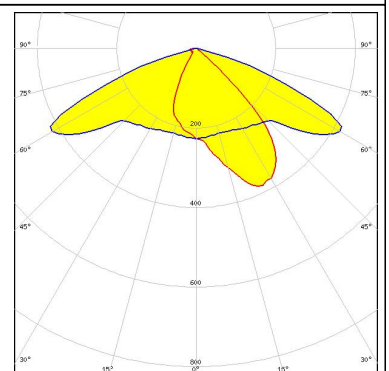

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON MZ
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.730 cd/lm
LEDs/each optic 1
Light colour White
Required components:

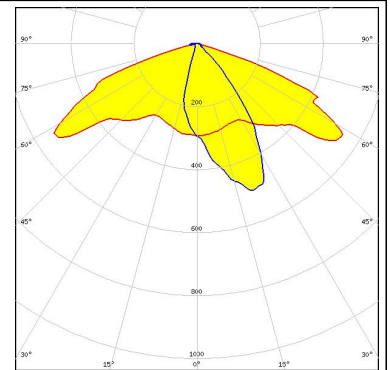


LUMILEDS

LED LUXEON XR-M linear 1x3, 1x4, 1x5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.540 cd/lm
LEDs/each optic 1
Light colour White
Required components:

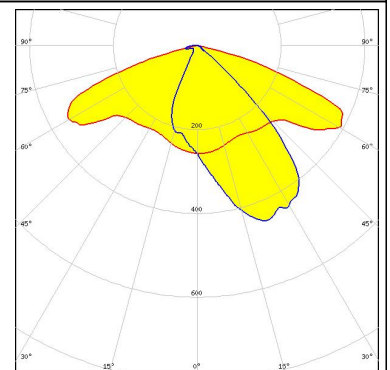


NICHIA

LED NS9x383
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.690 cd/lm
LEDs/each optic 1
Light colour White
Required components:

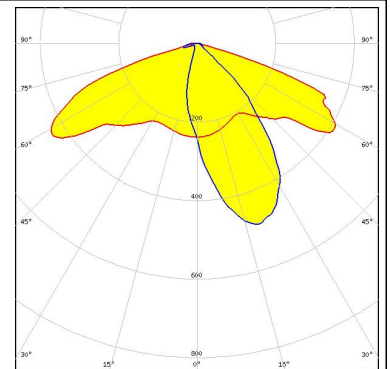

OPTOGAN


LED OLP-5065F6L-06A
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.650 cd/lm
LEDs/each optic 1
Light colour White
Required components:

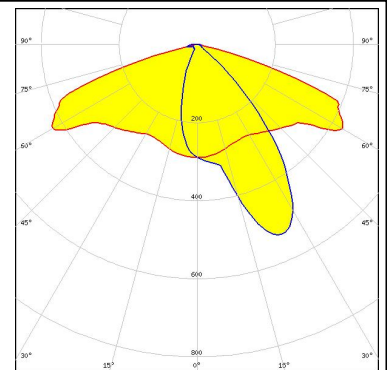

PHOTOMETRIC DATA (MEASURED):

OPTOGAN


LED OLP-5065F6L-06A
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.650 cd/lm
LEDs/each optic 1
Light colour White
Required components:

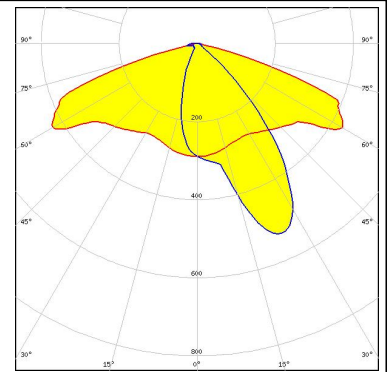

OSRAM

Opto Semiconductors

LED Duris S10
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.580 cd/lm
LEDs/each optic 1
Light colour White
Required components:

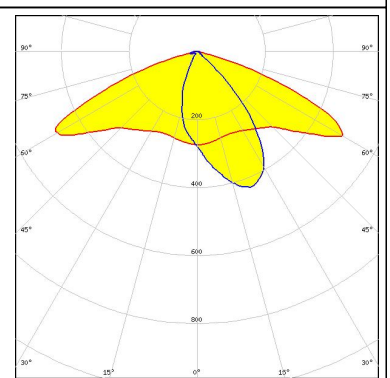


PHOTOMETRIC DATA (SIMULATED):



LED LUXEON M/MX
FWHM Asymmetric
Efficiency 82 %
Peak intensity 0.440 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover

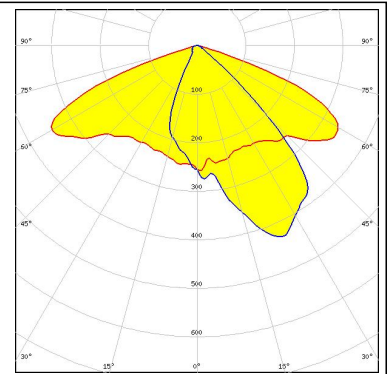

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)