



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

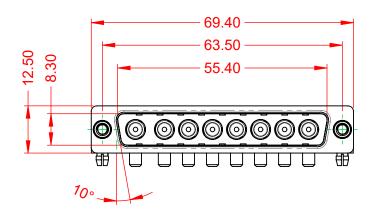



NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:**

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 30A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



10.67	
20.33	

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 629 COMBO ASSEMBLY						
	DRAWN: C.B	DATE: JAN. 01/2019				
	CHECKED:	DATE:				
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2				
	DRAWING NUMBER: 629-8W8-250-3ND					

629-8W8-250-3ND

PART NUMBER:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

(<u>00</u>) 0 2W2

(OO) o 2WK2

0 (.0.

5W1

000)0 3W3








11W1

0000000 5W5






13W3










17W5










21W4









47W1

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY							
	DRAWN: C.B		DATE: JAN. 01/2019			19		
	CHECKED:		DATE:					
	SCALE: N.T.S		SHEET	2	OF	2		
)	DRAWING NUMBER: 629-8V		250-3NE)		ISSUE		

629-8W8-250-3ND

PART NUMBER:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT