ITEM	PART#	DESCRIPTION	QTY	UOM
A, B	22013067	100KKTermHsg W/LRamp W/PoR6Ckt 2695-06RP	2	PC
C	8500113	KK 100 Crp Term Std 22-30 Awg Tin	12	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B6	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B5	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A5	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A6	B1	1X22AWG DISC MPPE BK UL11028	BLACK

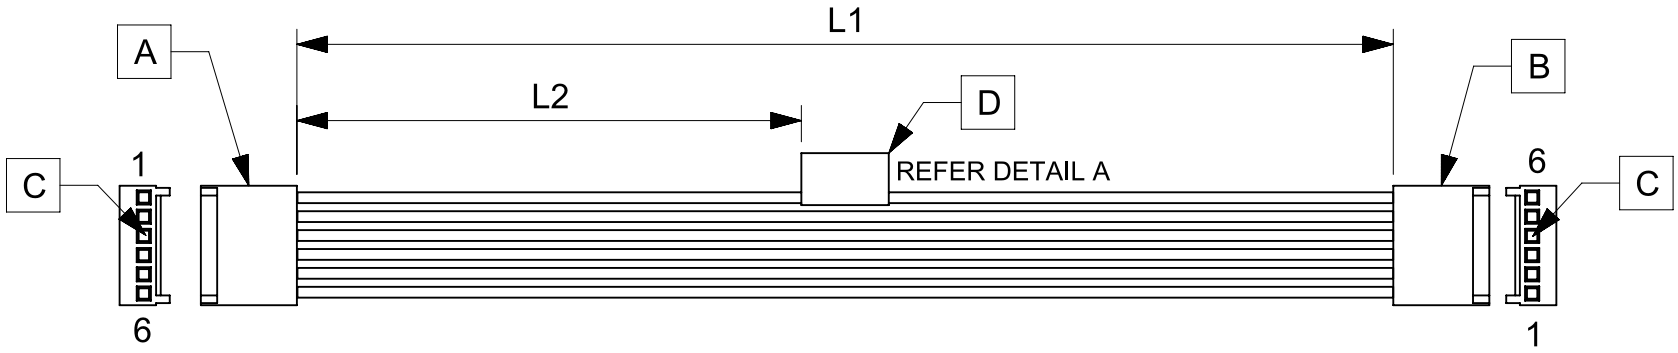

TABLE			
PART NUMBER	L1	L2	TITLE
2177961061	150±8	63 REF	KK 2.54 SR R-R 6CKT 150MM DISC Sn
2177961062	300±10	138 REF	KK 2.54 SR R-R 6CKT 300MM DISC Sn
2177961063	600±10	288 REF	KK 2.54 SR R-R 6CKT 600MM DISC Sn

NOTES
1. Cable assembly must pass 100% for continuity and polarity.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
11/01/2021	A	INITIAL RELEASE	ARAJU

DOCUMENT STATUS	P1	RELEASE DATE	2021/01/11 10:46:54

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 652805
DRWN: ARAJU 2021/01/09
CHK'D: RDESAI01 2021/01/11
APPR: RDESAI01 2021/01/11
INITIAL REVISION:
DRWN: ARAJU 2021/01/09
APPR: RDESAI01 2021/01/11

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2177961061	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A4-SIZE	217796	SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14