


a YAGEO company

## C878AF24250AA4J

C87, Film, Film/Foil Polypropylene, Motor Run, 2.5 uF, 5%, 470 VAC

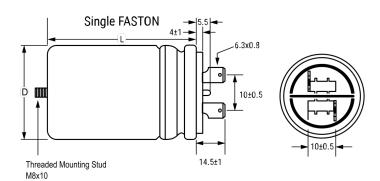

General Information Series C87 Dielectric Film/Foil Polypropylene Style Aluminum Case, Plastic Cover, Spun Seal Description Features Spun Seal, Safety Class S2, UL\_94 V0 Disk RoHS Yes Lead Fast On (1+1) UL, VDE, CQC, CSA (240VAC), UL\_94 VO Qualifications AEC-Q200 No Component 36 g Weight

Click here for the 3D model.

**Packaging Quantity** 

| Dimensions |             |
|------------|-------------|
| D          | 30mm +1mm   |
| L          | 48mm +/-2mm |

| Packaging Specifications |              |  |
|--------------------------|--------------|--|
| Mounting                 | Bolt - M8x10 |  |
| Packaging                | Bulk Bag     |  |

115

| Specifications        |           |  |  |
|-----------------------|-----------|--|--|
| Capacitance           | 2.5 uF    |  |  |
| Capacitance Tolerance | 5%        |  |  |
| Voltage AC            | 470 VAC   |  |  |
| Temperature Range     | -25/+85°C |  |  |
| Rated Temperature     | 85°C      |  |  |
| Max dV/dt             | 20 V/us   |  |  |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.