


VE1210K251R050

VE, Varistors, Low Voltage High Temperature, 65 V, 50 VAC, 82 V, 137 V, 3 A, 250 A, 1.7 J, 10 mW

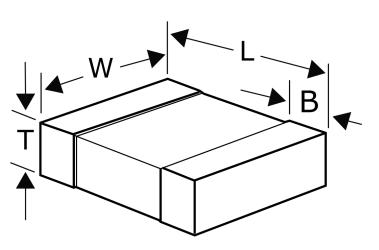

Click here for the 3D model.

Dimensions	,
Chip Size	1210
L	3.2mm +/-0.3mm
W	2.5mm +/-0.25mm
Т	1.75mm
В	0.5mm +/-0.25mm

Packaging Specifications		
Packaging	T&R	
Packaging Quantity	2000	

Constitution for		
General Information		
Series	VE	
Type	Varistors	
Style	SMD Chip	
Description	Surface Mount Varistors	
Features	Low Voltage High Temperature	
Termination	Nickel Tin	
RoHS	Yes	
Qualifications	IEC, UL, AEC-Q200	
AEC-Q200	Yes	

Specifications	
Voltage DC	65 VDC (25C)
Voltage AC	50 VAC
Temperature Range	-55/+150°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	82 VDC at 1 mA
Clamping Voltage	137 V
Clamping Current	3 A (8/20 us MAX)
Surge Current	250 A (8/20 us MAX)
Energy	1.7 J (10/1000 us MAX)
Capacitance	470 pf (1kHz)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.