
<u>Contact Dimensions:</u>
525-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.150(3.81)
.100 (2.54) Contact Spacing x .200 (5.08) Row Spacing

DO NOT MAKE MANUAL REVISIONS TO MASTER.

.330[8.38] CARD SLOT .160[4.06] POINT OF CONTACT

1

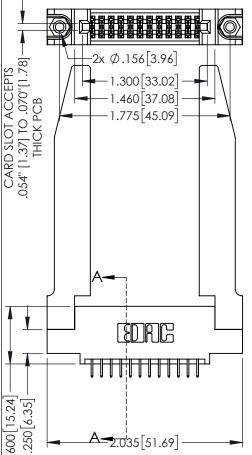

345/395 SERIES CARD EDGE CONNECTOR PART NUMBER: 345-024-525-578

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO	. 345-ENG-MASTER
DRAWN: R.STA.MONICA	DATE:MAY.16/2017
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 2
DRAWING NUMBER	ISSUE
345-ENG-MASTER	1

SECTION A-A

CARD SLOT ACCEPTS .054" [1.37] TO .070"[1.78] → THICK PCB	2x Ø.156[3.96] 1.300[33.02] 1.460[37.08] 1.775[45.09]
[5]	
600 [15.24] .250 [6.35] -	A=2.035[51.69]


INSULATOR MATERIAL: THERMOPLASTIC PBT BLACK, UL 94V-0 CONTACT MATERIAL; COPPER TIN ALLOY


CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING

ON THE CONTACT TAILS, NICKEL UNDERPLATE



.107 [2.72] .082 [2.08] .157 [4] .232 [5.89] .125(3.18) to .210(5.33) .125(3.18) to .210(5.33) Outside Tails Outside Tails .045(1.14) to .060(1.52) .045(1.14) to .060(1.52) Between Tails Between Tails **Contact Code 555 Contact Code 556**

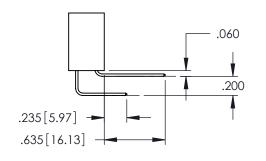

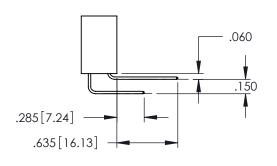



Contact Code 558

Contact Code 559

Contact Code 560

INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0 DAP MATERIAL AVAILABLE UPON REQUEST

CONTACT MATERIAL; COPPER ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

345/395 SERIES CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS

YOUR CONNECTION TO QUALITY & SERVICE

	ACAD REFERENCE NO	. 345-ENG-MASTER
S	DRAWN: R.STA.MONICA	DATE:MAY.16/2017
	CHECKED:	DATE:
	SCALE: 1:1	SHEET 2 OF 2
ED	DRAWING NUMBER	ISSUE
5	345-ENG-MASTER	1