

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

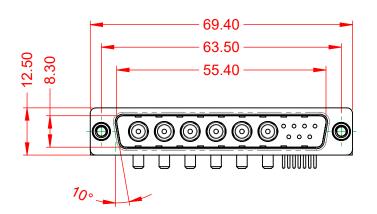



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ" GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



10.67	
20.33	

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 C	629 COMBO ASSEMBLY				
	DRAWN: C.B	DATE: JAN. 01/2019				
	CHECKED:	DATE:				
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2				
	DRAWING NUMBER: 629-13W6	6650-2T6 ISSUE				

629-13W6650-2T6

PART NUMBER:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

00 2W2

(COO) o 2WK2

o(:o:

5W1

000)0 3W3







11W1

000000 5W5





13W3






000000:::



17W5






13W6



0000000

21W4









43W2

47W1

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.:	629 COMBO ASSEMBLY					
DRAWN: C.B		DATE:	JAN.	01/20	19	
CHECKED:		DATE:				
SCALE: N.T.S		SHEET	2	OF	2	
DRAWING NUMBER:	629-13W6	6650-2T6	3		ISSL	JΕ

629-13W6650-2T6

PART NUMBER:

COMPLIANT