
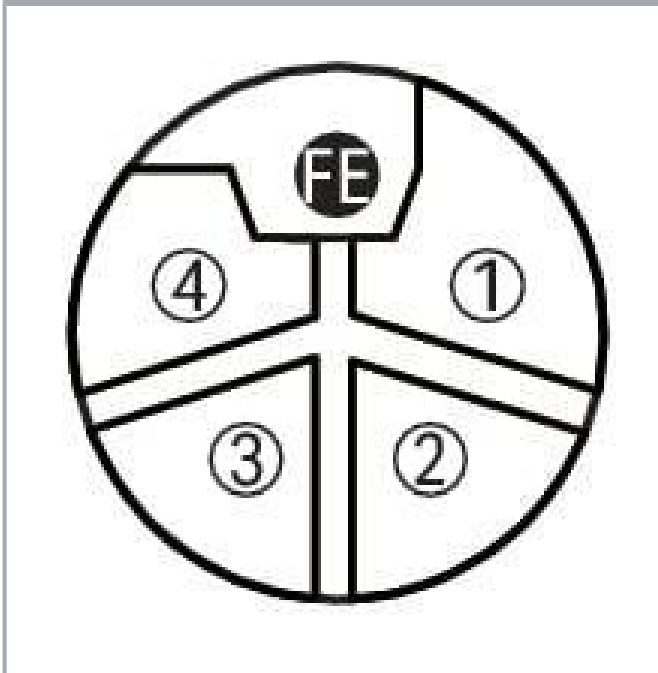


Data sheet | Item number: 756-3501/050-075

Power cable; M12L socket; straight; 5-pole; Length: 7.5 m

[www.wago.com/756-3501/050-075](http://www.wago.com/756-3501/050-075)

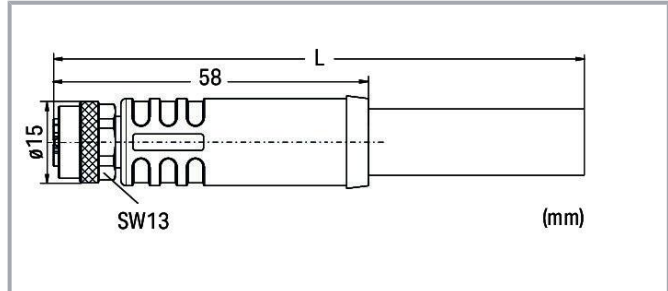

Pin 1 ... 4/FE: 1.5 mm<sup>2</sup>

1	)	brown	_____
2	)	white	_____
3	)	blue	_____
4	)	black	_____
FE	)	gray	_____

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Item description

### Short description:

These power cables are an accessory for the WAGO I/O System Field.

Use them as flexible, flame-retardant and halogen-free supply cables for industrial mechanical engineering applications – particularly those with high requirements, e.g., for use in cable chains (drag chains) and moving machine parts.

- Strong resistance to microbes and hydrolysis
- Good to very good weather resistance (UV and ozone)
- High resistance against welding sparks
- Excellent chemical and oil resistance
- Silicon- and PVC-free
- Free from paint-wetting impairment substances
- Flexible at low temperatures

## Data

### Technical data

#### General

Operating voltage	63 VDC per IEC 60664-1
Operating current	16 A
Rated surge voltage	1.5 kV per IEC 61076-2-111
Insulation resistance	1000 MΩ
Contact resistance	5 mΩ
Conductor resistance	≤ 13.7 Ω/km
Pollution degree	3 per IEC 60664-1
Protection type	IP68
Ambient temperature (operation)	-40 ... +90 °C (UL max. +80 °C)
Ambient (operating) temperature (static)	-40 ... +90 °C
Ambient (operating) temperature (dynamic)	-30 ... +90 °C

#### Suitable for drag chains

Ambient air (operating) temperature in drag chain	-25 ... +60 °C
Bending radius	Fixed: >4xØ; Flexible: >7.5xØ
Bending cycles	10 Mio.

#### Other properties

Note Exclusion of hazardous substances per: 200/53/EC, 2003/11/EC,

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Cable

Cable length	7.5 m
Type code	LiF9YH-11Y-0B 5x1.5mm <sup>2</sup>
Conductor configuration	Bare copper wire (84 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Sheathed cable color	gray
Sheathed cable diameter	9.6 ... 10.2 mm

## Connector

Connection type	M12 socket - Free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	L-coded
Housing material	TPU/TPU, black (~ RAL 9005)
Connector	Hexagon knurled nut: CuZn; Knurled nut surface: Nickel plated; Sealing ring: FPM/FKM
Tightening torque	1 Nm

## Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143974462
Customs tariff number	85444290900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2237	E519600

Subject to changes. Please also observe the further product documentation!



---

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 756-3501/050-075	URL	Download
Power cable; M12L socket; straight; 5-pole; Length: 7.5 m		

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!