


R775I1150DQ00J

Aliases (775I1150DQ00J)

Not for New Design

R77, Film, Double Metallized Polypropylene, General Purpose, 1500 pF, 5%, 1300 VDC, 85°C, Lead Spacing = 15mm

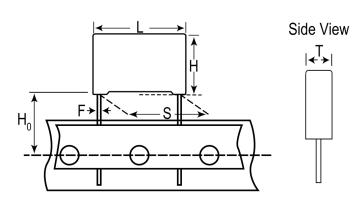

Click here for the 3D model.

Dimensions		/
L	18mm +0.3/-0.5mm	
Н	11mm +0.1/-0.5mm	
Т	5mm +0.2/-0.5mm	
S	15mm +0.6/-0.1mm	
НО	18.5mm +/-0.5mm	
F	0.8mm +/-0.05mm	

Packaging Specifications		
Packaging	Ammo, 360x340x59mm, Box	
Packaging Quantity	800	

General Information			
Series	R77		
Dielectric	Double Metallized Polypropylene		
Style	Radial		
Features	Pulse		
RoHS	Yes		
Lead	Wire Leads		
AEC-Q200	No		
Component Weight	1.663 g		
Notes	Series Replaced by R76.		

Specifications	
Capacitance	1500 pF
Capacitance Tolerance	5%
Voltage AC	500 VAC
Voltage DC	1300 VDC
Temperature Range	-55/+105°C
Rated Temperature	85°C
Dissipation Factor	0.06% 10kHz, 0.1% 100kHz
Insulation Resistance	100 GOhms
Max dV/dt	4500 V/us
Inductance	10 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.