




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-920467~470	2009/02/19	Vicky	Update the drawing.
D	LEN1160220~223	2011/06/22	Jiang Jun Hua	Change the view
E	LEN1530296~299	2015/02/11	Ruru	Change Logo

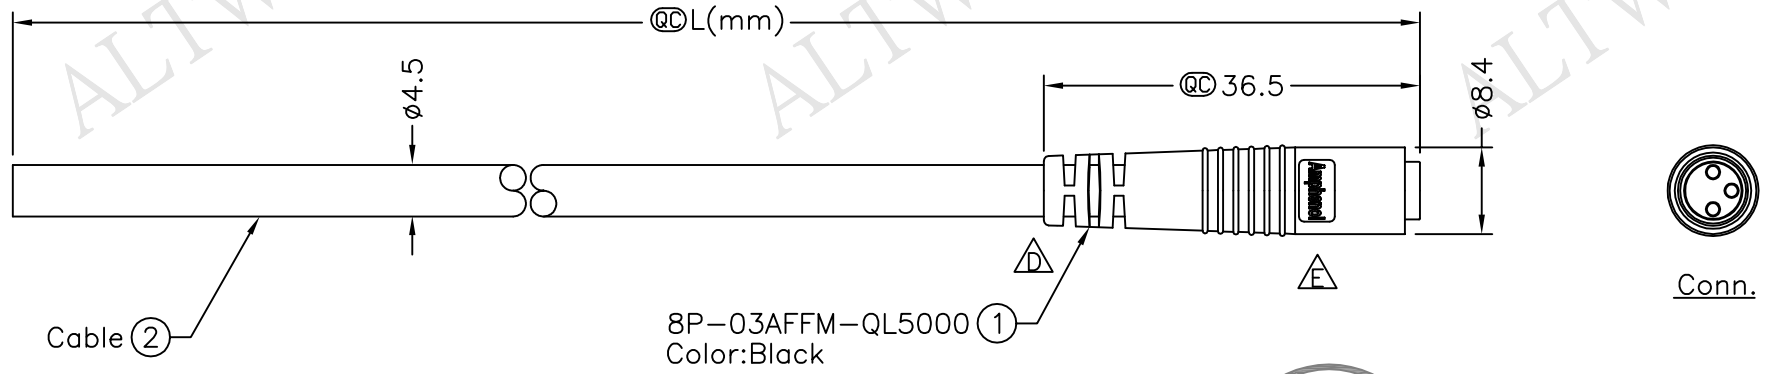

8P-03AFFM-QL5BXX

XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters

Cable Length(L):01~99Meters



Pin Assignments  
Front View

Conn.	Wire Color	Pin Out
4	Black	黑
3	Blue	藍
1	Brown	棕

- Notes:
- \* @C Important Dimension.
  - \* Waterproof Rate: IP65.
  - \* Connector: PU, Black
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Cable: 22AWG\*3C+Insulation, PU, OD=4.5mm, Black
  - \* Cable Length Tolerance:
    - 01M:±40mm
    - 02M~05M:±60mm
    - 06M~10M:±100mm
    - 11M~30M:±200mm
    - 31M~99M:±500mm

UNIT:mm	
TOLERANCE	
±0.5 mm	

TITLE	M8 Conn	
Cable Quick 3P F Conn F Pin		
SCALE	Free	SHEET 1 OF 1
REV. E	SIZE A4	@C :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2015/02/11
8P-03AFFM-QL5BXX	Rita	2015/02/11
ALTW	Lion	2015/02/11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.