# 1SNK910304R0000 - ACTIVE


### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK910304R0000 Terminal Block & Strip Conducting Accessories, Jumper Bar, 4 Pole, Orange, Product Spacing .394 in [10 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK

#### View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories

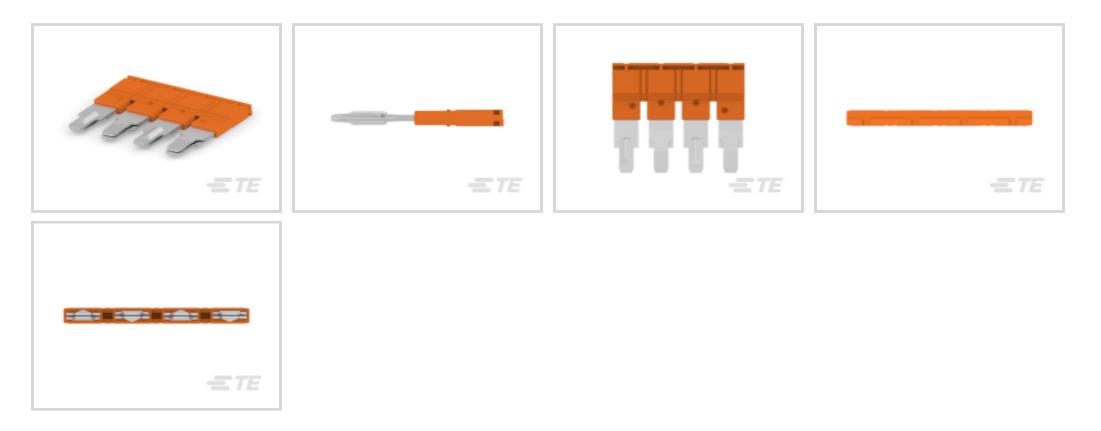

Conducting Accessory Type: Jumper Bar

Number of Poles: 4

PCB Mount Retention Type: Screwless

Primary Product Color: Orange

Product Spacing: 10 mm [.394 in]

## Features

### Product Type Features

Conducting Accessory Type	Jumper Bar
Configuration Features	
Number of Poles	4
Electrical Characteristics	
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	6000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	67 A
Short-Time Withstanding Current Rating @ 1s	1920 A
Power Loss	2.4 W
Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	1000 V
Current Rating (UL)	67 A
Current Rating (IEC)	76 A

**C** For support call+1 800 522 6752

Terminal Block & Strip Conducting Accessories, Jumper Bar, 4 Pole, Orange, Product Spacing .394 in [10 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



### **Body Features**

Plastic & Resin Material Type	Polyamide
Product Weight	9.4 g[.332 oz]
Primary Product Color	Orange
Contact Features	
Contact Current Rating (Max)	76 A
Mechanical Attachment	
PCB Mount Retention Type	Screwless
Dimensions	
Product Depth	31.5 mm[1.24 in]
Product Width	10 mm[.394 in]
Product Height	30.8 mm[1.213 in]
Product Spacing	10 mm[.394 in]
Usage Conditions	
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Industry Standarda	

## Industry Standards

IP Rating

IP20

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

Terminal Block & Strip Conducting Accessories, Jumper Bar, 4 Pole, Orange, Product Spacing .394 in [10 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

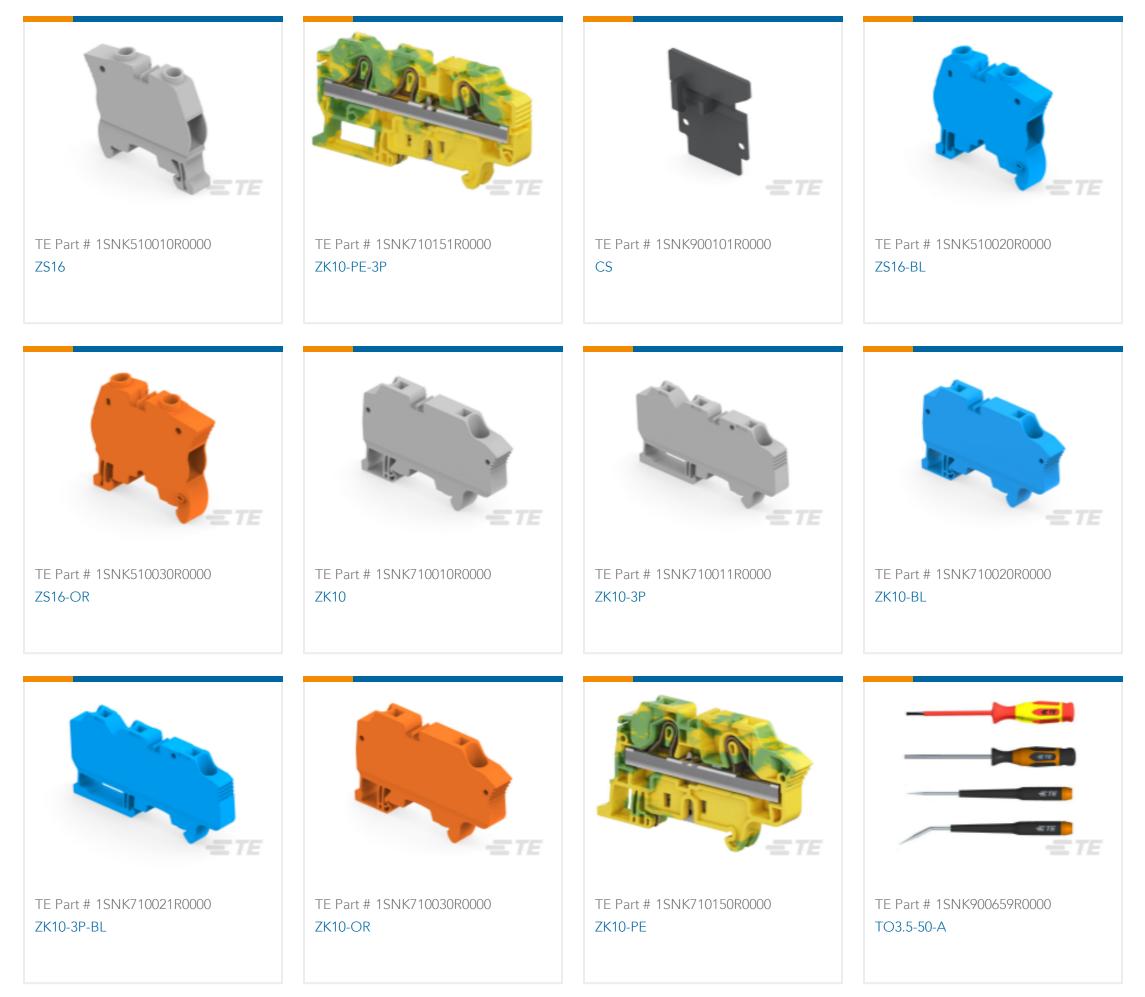


## Also in the Series | ENTRELEC SNK

Terminal Block & Strip Conducting Accessories, Jumper Bar, 4 Pole, Orange, Product Spacing .394 in [10 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



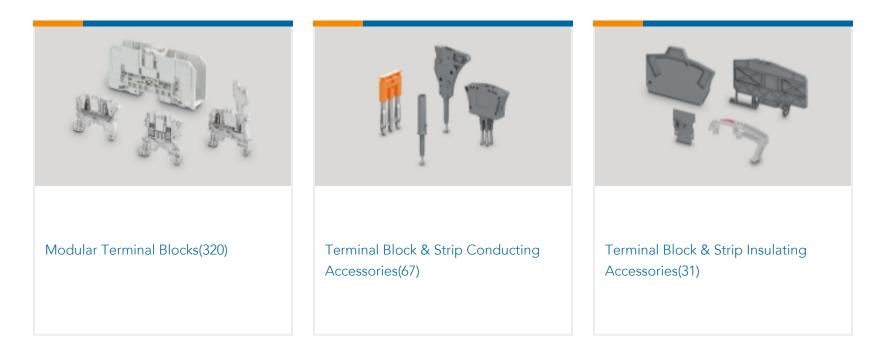

# Customers Also Bought

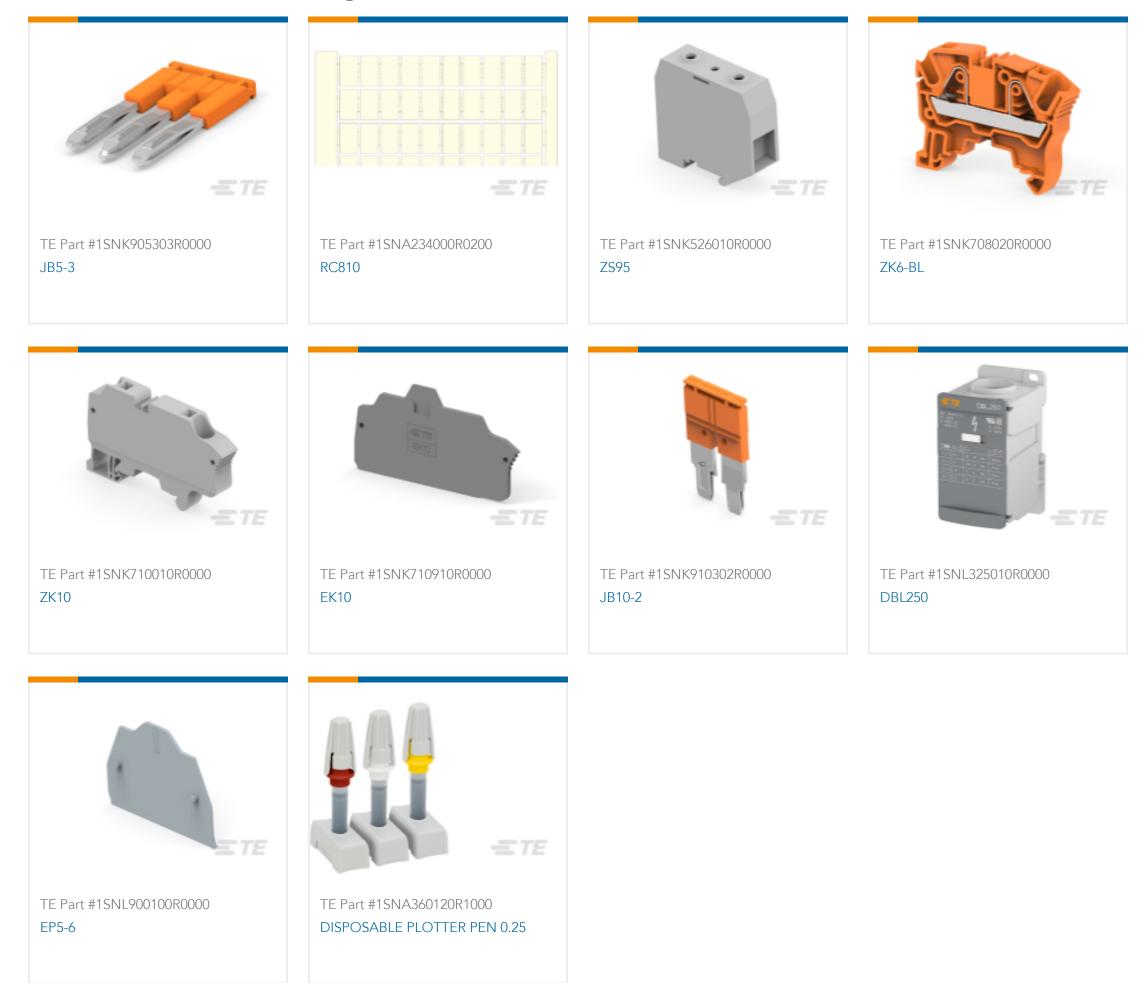

## Documents

### **CAD** Files

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1SNK910304R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK910304R0000\_A.3d\_igs.zip

Terminal Block & Strip Conducting Accessories, Jumper Bar, 4 Pole, Orange, Product Spacing .394 in [10 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



English

Customer View Model ENG\_CVM\_CVM\_1SNK910304R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

**ENTRELEC Terminal Block - Master Catalog** 

### **ENTRELEC Terminal Block - Master Catalog**

English

### JB10-4

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)