


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00399	Connector, mono plug, 3.5xL23.5 mm, brass, nickel plated, molding style	1	
2	30-00177	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00028	Overmold, PVC, black	1	black

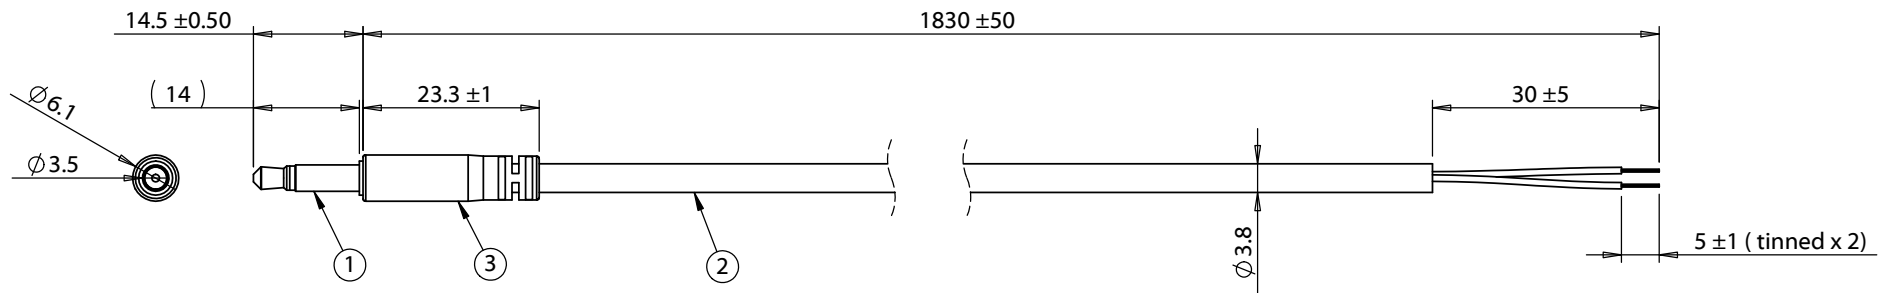

**Notes:**

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Wiring Diagram	
50-00399	wire color
tip	red
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	5/24/2010	Initial release	GL <small>Digitally signed by GL Date: 2016.10.28 12:19:47 -07'00'</small>	RoHS compliant			
A1	10/6/2011	Updated specification	Verified: DN <small>Digitally signed by DN Date: 2016.10.28 15:29:01 -07'00'</small>	Function test: no open, no short circuit, no intermittent			
A2	3/28/2012	Updated wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:			
A3	10/9/2014	Updated connector		Cable, 1830 mm, 3.5 mm 50-00399 slim mono plug to 5 mm tinned, 28 AWG, 30-00177, shielded		Size: A Part number: 10-00344	
A4	10/21/2016	Corrected wiring diagram			Scale: 1:2		Sheet 1 of 1