

- PFC
- Wide Range AC Input
- Low Profile, Industry Standard Footprint
- Global Safety Agency Compliance
- RoHS Compliant

Key Market Segments & Applications

- Video/Audio Routers
- Datacom
- Point of Sale
- Test & Measurement
- LED Signs and Lighting

ZPS100 Series

3" x 5" 100W AC-DC
Power Supplies

ZPS100 Features and Benefits

Features

- Industry Standard Footprint
- Up to 85% efficiency
- Broad product range
- Meets EN61000-4 immunity

Benefits

- Available to second source
- Less system heating
- Optimisation of power supply to system
- Greater reliability

Specifications

MODEL		ZPS100
ITEMS		
Input Voltage range	-	90 - 264VAC (47 - 440Hz) or 120 - 370VDC
Inrush Current (132/264VAC)	A	25 / 50 (cold start)
Input Current (115/230VAC)	A	1.1 / 0.6
Temperature Coefficient	-	±0.05%/°C
Voltage Accuracy	-	±1%
Minimum Load	A	None
Load Regulation	-	±1%
Line Regulation	-	±0.5%
Ripple & Noise (1)	mV	1% or 50mV whichever is greater
Short Circuit Protection	-	Continuous - hiccup mode
Overvoltage Protection	V	Typically 110-130% of nominal
Hold Up Time (Typ)	ms	8ms at 115VAC input
LED Indicator	-	Green LED = OK
Operating Temperature		0 to +70°C with derating
Storage Temperature	-	-20 to +85°C
Humidity (non condensing)	-	10 - 95% RH
Cooling	-	Convection
Withstand Voltage		Input to Ground 1.5kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.
Isolation Resistance		>100M at 25C & 70%RH, Output to Ground 500VDC
Vibration (non operating)		23.52m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)
Shock	-	< 196.1 m/s ² (20G)
Class 1	-	UL60950, CSA60950, EN60950-1 Class 1, CE Mark (LVD)
Conducted & Radiated EMI	-	EN55022-B, FCC Class B
Immunity	-	EN61000-4-2,-3,-4,-5,-6,-8
Weight (Typ)	g	385g
Size (WxLxH)	mm	127 X 76.2 X 34 (including underside components)
Warranty	-	2 Year

Notes: (1) Measured with 0.1uF ceramic & 10uF electrolytic at 20MHz BW




Model Selector

Model	Output Voltage (V)	Maximum Output (A)	
ZPS100-3R3	V1	3.3	20
ZPS100-5	V1	5	20
ZPS100-9	V1	9	11.2
ZPS100-12	V1	12	8.4
ZPS100-15	V1	15	6.7
ZPS100-18	V1	18	5.6
ZPS100-24	V1	24	4.2
ZPS100-28	V1	28	3.6
ZPS100-48	V1	48	2.1


INTERMEDIATE VOLTAGES AVAILABLE
PLEASE CONSULT SALES

For full data and drawings please visit
www.emea.tdk-lambda.com/www/zp

Derating Curve ZPS100 Series

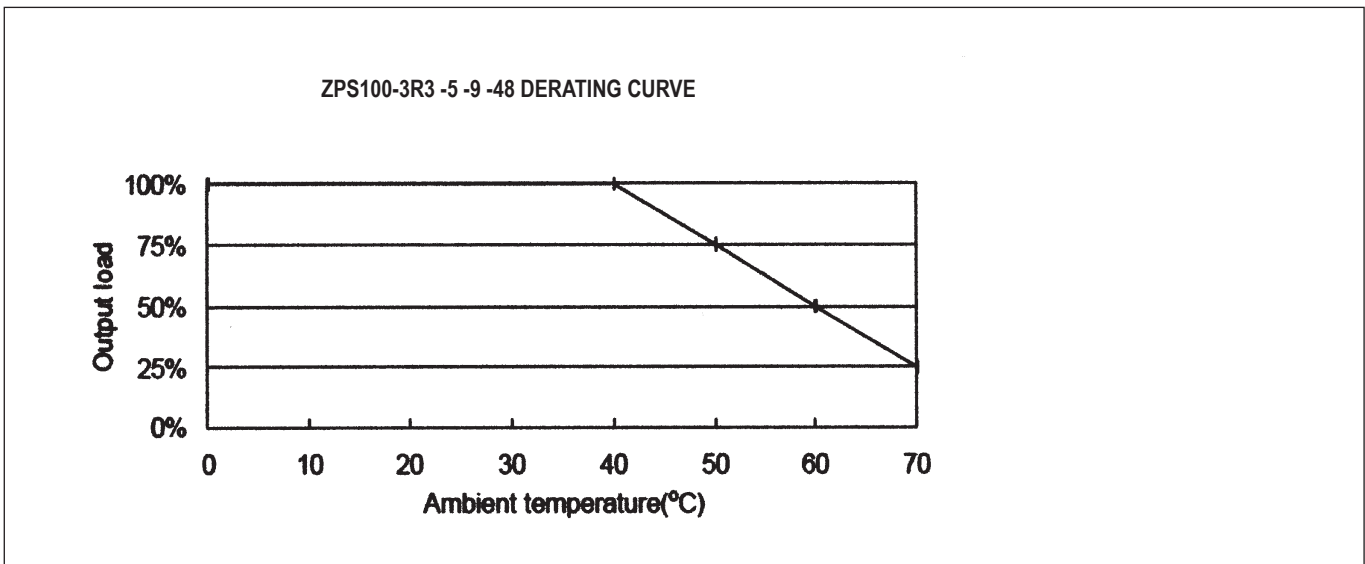


Derating Curve ZPS100 Series

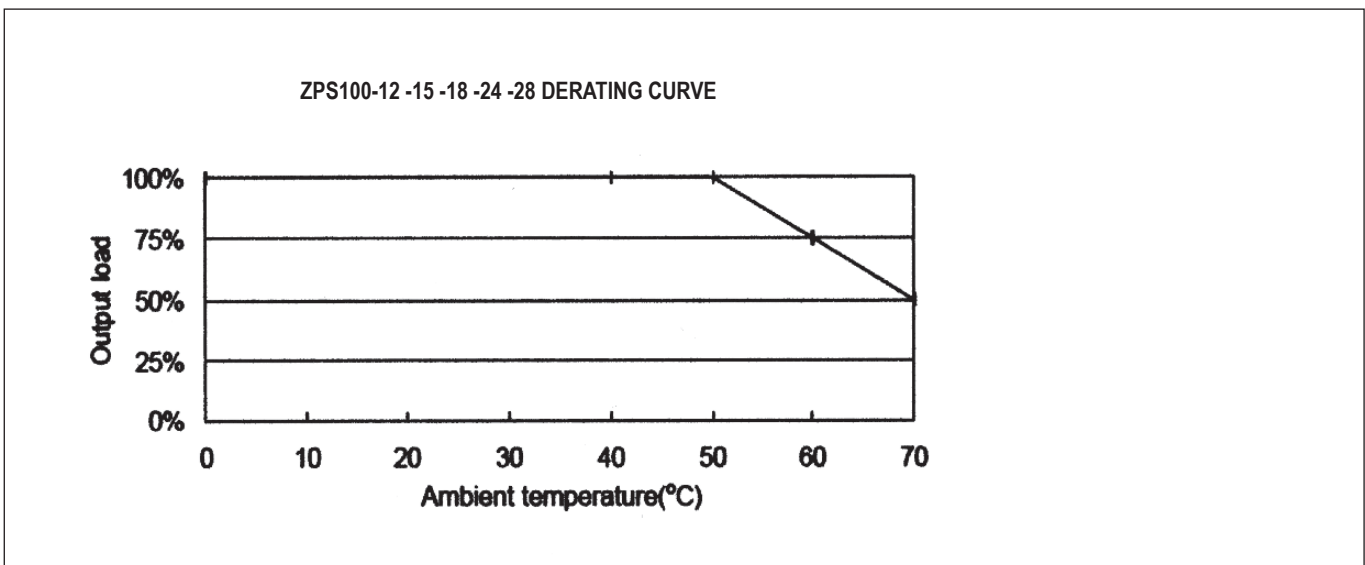




Outline Drawing ZPS100 Series

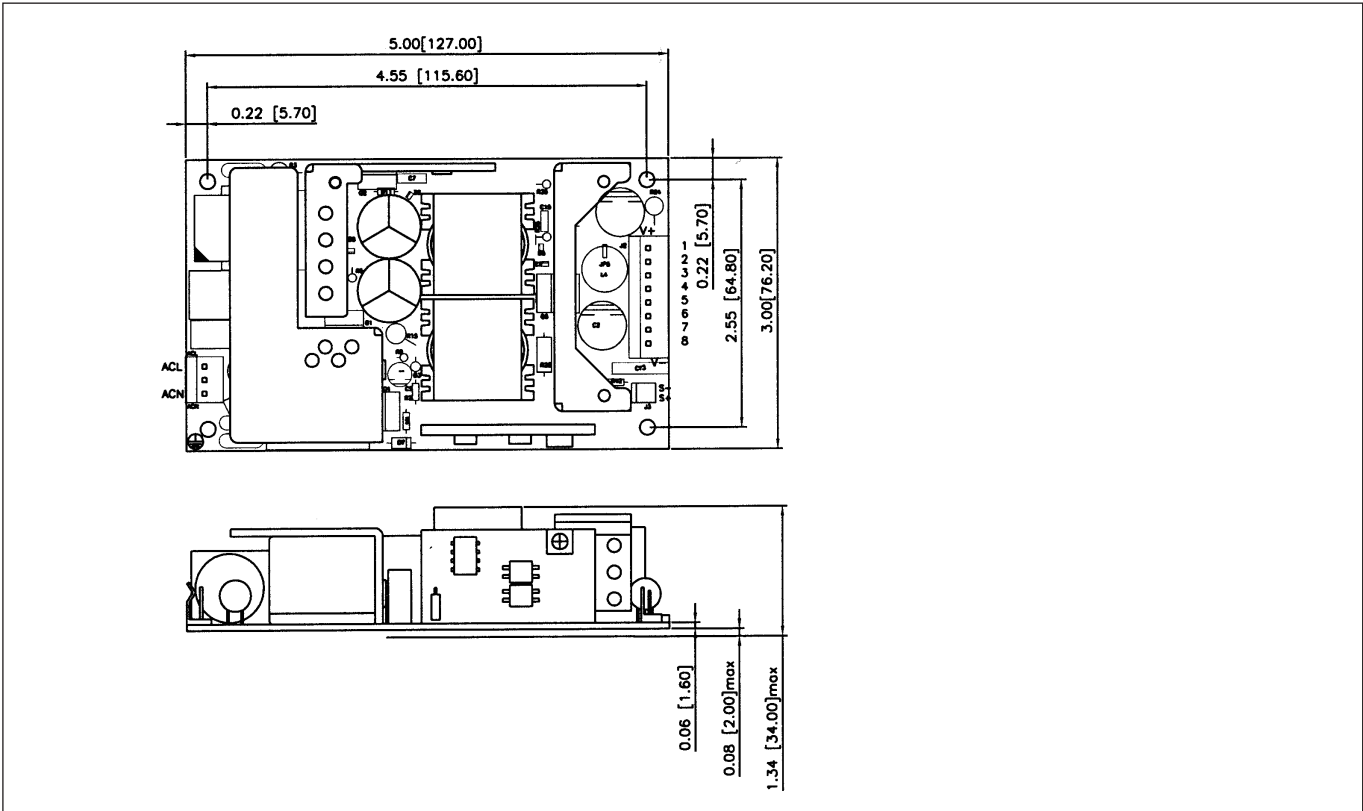

Outline Drawing ZPS100-5 Series

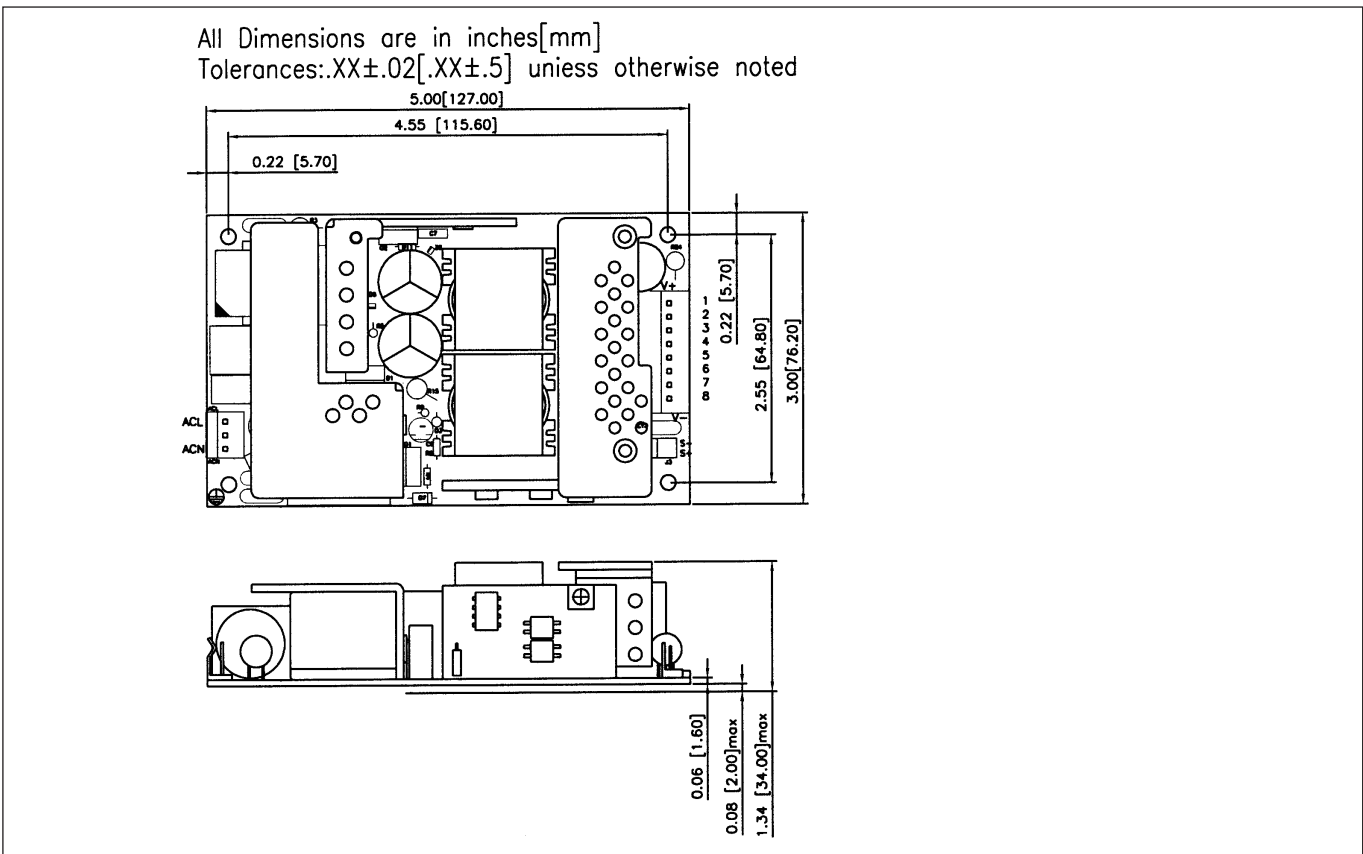

Input Connector Mates with Molex Housing 09-50-3031 and Molex 2478 Series Crimp Terminal
Output Connector Mates with Molex Housing 09-50-1081 and Molex 5194 Series Crimp Terminal



TDK-LAMBDA EMEA

www.emea-tdk-lambda.com



TDK-Lambda France SAS

ZAC des Delaches
BP 1077-Gometz-le-Chatel
91940 Les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



TDK-Lambda Italy

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz Givat
Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il

LOCAL DISTRIBUTION

