
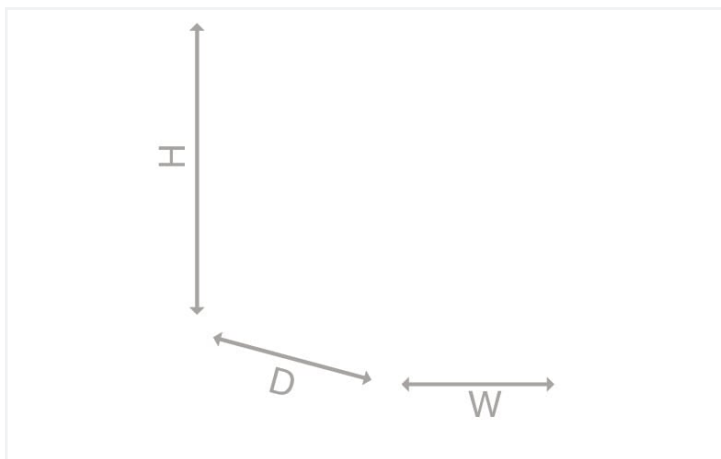


# Data Sheet | Item Number: 2787-2346

Power supply; Pro 2; 3-phase; 24 VDC output voltage; 10 A output current; Top-Boost + PowerBoost; communication capability

<https://www.wago.com/2787-2346>

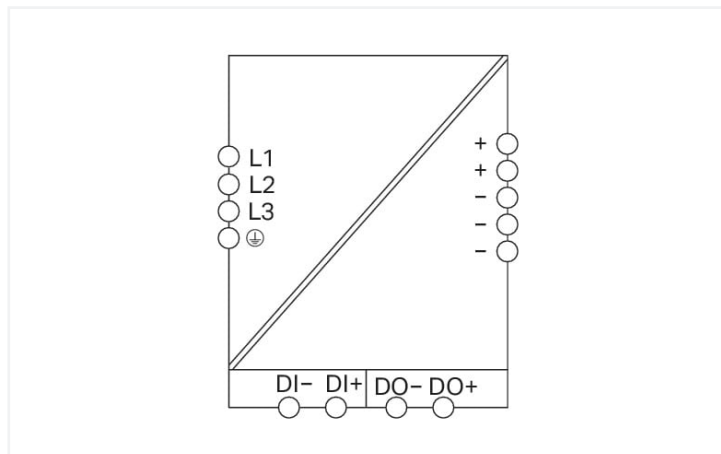

## Features:

- Power supply with TopBoost, PowerBoost and configurable overload behavior
- Configurable digital signal input and output, optical status indication, function keys
- Communication interface for configuration and monitoring
- Optional connection to IO-Link, EtherNet/IP, Modbus TCP or Modbus RTU
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Pluggable connection technology
- Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201
- Marker slot for WAGO marking cards (WMB) and WAGO marking strips

## Technical data

Input	
Phases	3
Nominal input voltage $U_{i, nom}$	3 x AC 400 ... 500 V (Connection without neutral conductor)
Input voltage range	3 x AC 340 ... 550 V
Nominal mains frequency range	50 ... 60 Hz
Input current $I_i$	$\leq 3 \times 0.6$ A (400 VAC; 24 VDC / 10 A)
Inrush current	$\leq 15$ A (after 1 ms)
Power factor correction (PFC)	active
Mains failure hold-up time	$\geq 20$ ms (3 x 400 VAC)

Output	
Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Output voltage range	DC 24 ... 28 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, nom}$	10 A (24 VDC)
Nominal output power	240 W
Deviation	$\leq 1$ %
Residual ripple	$\leq 70$ mV (Peak-to-peak)
Current limitation	$1.1 \times I_{o, nom}$ (typ.)
Overload behavior	TopBoost/PowerBoost/Time-limited constant current mode (other overload behaviors can be set)

### Output

PowerBoost	DC 15 A (5 s)
TopBoost	up to 600 %

### Signaling and Communication

Signaling	Optical status indication (DC OK; load; warning and error states) Digital signal input and output (DI/DO)
Communication	USB (Communication Cable 750-923) Ethernet/IP (Communication Module 2789-9023) IO-Link (Communication Module 2789-9080) Modbus RTU (Communication Module 2789-9015) Modbus TCP (Communication Module 2789-9052)

### Efficiency/power losses

Power loss $P_1$	$\leq 3$ W (Standby); $\leq 3$ W (No load); $\leq 18$ W (400 VAC; nominal load)
Efficiency (typ.)	93 % (400 VAC; 10 A; 25 °C)

### Circuit protection

Internal fuse	3 x T 2.5 A / 500 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	3 x 16 A (for USA/Canada: 3 x 15 A)

### Safety and protection

Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2200 V
Isolation voltage (sec.-PE)	DC 0.5 kV
Isolation voltage (sec.-signal)	DC 0.5 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	$\leq$ DC 35 V
Overvoltage category	III ( $\leq 2000$ m a.s.l.); II ( $> 2000$ m a.s.l.)
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	Internal protective circuit $\leq 35$ VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	$> 1,000,000$ h (per IEC 61709)

### Connection data

Connection type 1	Input/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	WAGO 831 Series
Solid conductor 2	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor 2	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 6 mm <sup>2</sup>
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 6 mm <sup>2</sup>
Strip length 2	13 ... 15 mm / 0.51 ... 0.59 inches

### Physical data

Width	50 mm / 1.969 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches
Note (dimensions)	Height without connector Height with connector: 166 mm

### Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

### Material Data

Fire load	0 MJ
Weight	1000 g

### Environmental requirements

Ambient temperature (operation at $U_N$ )	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Surrounding air temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	See instruction leaflet
Operating altitude (max.)	5000 m

### Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201

### Commercial data

ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966137835
Customs tariff number	85044083900

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 61010-2-201	UL-US-2209512-0

#### Approvals for hazardous areas




Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	A-E198726

### Downloads


### Environmental Product Compliance

**Compliance Search**



Environmental Product Compliance 2787-2346 

**Documentation**


**Manual**

Product Manual Power supply; Pro 2; 3-phase; 24 VDC output voltage; 10 A output current	V 1.0.1 15.02.2022	pdf 8120.46 KB	
---	-----------------------	-------------------	---

**Bid Text**


2787-2346	11.05.2022	xml 9.31 KB	
2787-2346	11.05.2022	docx 29.81 KB	

**Instruction Leaflet**


Stromversorgung Pro 2	V 1.1.0 03.03.2022	pdf 4602.62 KB	
-----------------------	-----------------------	-------------------	---

**CAD/CAE-Data**

**CAD data**

2D/3D Models 2787-2346	
---------------------------	---

**CAE data**

EPLAN Data Portal 2787-2346	
--------------------------------	---

**1 Compatible Products**

**1.1 Optional Accessories**

**1.1.1 Cables and connectors**

**1.1.1.1 Communication cable**



**Item No.: 750-923/000-001**  
Configuration cable; USB connector;  
Length: 5 m

**1.1.2 Communication**

**1.1.2.1 Communication cable**



**Item No.: 750-923**  
Configuration cable; USB connector;  
Length: 2.5 m

### 1.1.2.2 Communication module



**Item No.: 2789-9023**

Communication module; EtherNet/IP; communication capability

**Item No.: 2789-9080**

Communication module; IO-Link; communication capability

**Item No.: 2789-9015**

Communication module; Modbus RTU; RJ45; communication capability

**Item No.: 2789-9052**

Communication module; Modbus TCP; communication capability

### 1.1.3 Marking

#### 1.1.3.1 Marker



**Item No.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

#### 1.1.3.2 Marker carrier



**Item No.: 2789-1233**

Marker carrier; for WMB or marking strips; Length: 33 mm

#### 1.1.3.3 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.1.4 Tool

#### 1.1.4.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

**Item No.: 210-721**

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured