



1211.5

RK 2,5-4/ZRL BU



M3

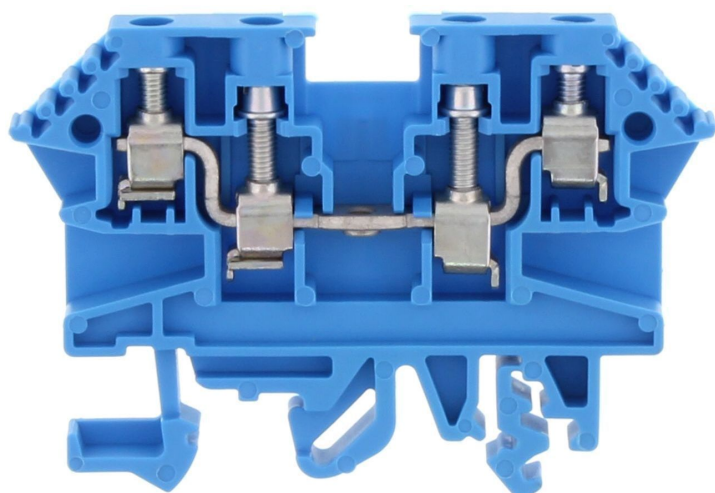

ERC

Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 6 mm, Colour: Blue

## Business data

Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	13.2 g
Weight per piece (including packaging)	13.97 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Prio-Article	1211.2
Product description	Feed-through terminal

1211.5

RK 2,5-4/ZRL BU

---

## Technical data

---

### Dimensions

---

Length	67 mm
Width	6 mm
Height TS 35/7.5	47 mm
Height TS 32	51.5 mm

---

### Ratings

---

Rated voltage	500 V
Rated current	24 A
Rated cross-section	4 mm <sup>2</sup>
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

---

### Technical data

#### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	4
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

#### Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
Gauge plug acc. to EN 60 947-1	A4
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	1

# Data sheet



1211.5

RK 2,5-4/ZRL BU

---

## Technical data

---

### Print

---

Colour	Blue
--------	------

---

### Environmental Product Compliance

---

REACH Conform	yes
---------------	-----

---

REACH Reference date	2021-07-08
----------------------	------------

---

REACH Candidate Substance Note	No
--------------------------------	----

---

RoHS Conform	yes
--------------	-----

---

### Approvals

#### UL Recognized

UL File Number	E95701
UL approval	UL 1059
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	30 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	30 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	10
UL torque	7 Lb In
UL wire material	Cu
UL factory wiring	yes
UL field wiring	yes
UL Recognized	yes

#### cUL Recognized

cUL File Number	E95701
cUL approval	C22.2 No 158
cUL Usegroup B: rated voltage	600 V
cUL Usegroup B: rated current	30 A
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	30 A
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	10
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	10
cUL torque	7 Nm
cUL wire material	Cu
cUL Recognized	yes

---

### Approvals

---

#### Standards and regulations

---

EAC approval	TR ZU 004/2011
EAC approval granted	yes

---


#### KEMA KEUR approval

---


KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	800 V
KEMA rated current	32 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	6 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	6 mm <sup>2</sup>
KEMA torque, min.	0.5 Nm
KEMA torque, max.	1 Nm

---

#### Media

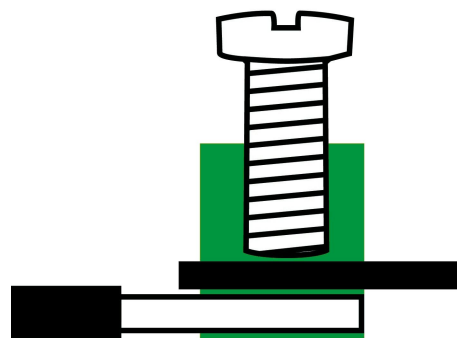


**M3**



**CRA<sup>®</sup> US**

**EAC**

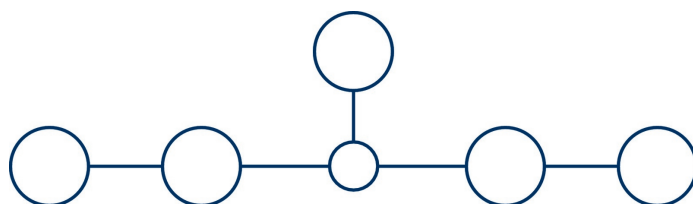

1211.5

RK 2,5-4/ZRL BU

---

## Accessories

---

### End plate

---



End plate, Width: 1.5 mm, Colour: Beige

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2575.2	AP 2,5/RL BG	4044211053680	50

---

### End stop

---



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST BG	4044211055547	50

---




1211.5

RK 2,5-4/ZRL BU

## Accessories


### Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 17 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2020.0	Q 3	4044211048235	50 ST



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.9 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2019.0	Q 2	4044211048228	50 ST



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 23.1 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data

Product number:	Article name	Creation date 16.12.2021 01:57:09 Subject to technical changes	GTIN (EAN)	Packaging unit
2021.0	Q 4		4044211048242	20 ST

1211.5

RK 2,5-4/ZRL BU


---

## Accessories

---

### Cross-connector

---

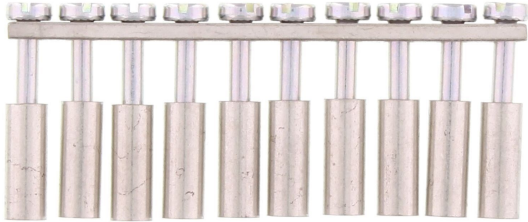

Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2022.0	Q 10	4044211048259	10 ST


---

1211.5

RK 2,5-4/ZRL BU

## Accessories


### Insulated cross-connector



Insulated cross-connector, No. of poles: 4,  
Mounting type: Can be screwed on, Width:  
21.9 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2742.2	QI 4 YE	4044211054823	20 ST

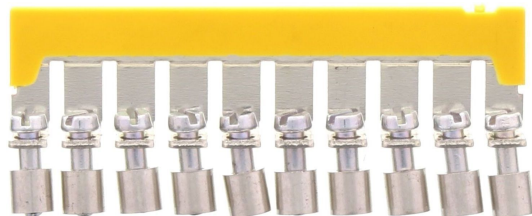

Insulated cross-connector, No. of poles: 10,  
Mounting type: Can be screwed on, Width:  
59.7 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2743.2	QI 10 YE	4044211054830	10 ST



Insulated cross-connector, No. of poles: 2,  
Mounting type: Can be screwed on, Width:  
10.4 mm, Colour: Yellow

#### General order data


Product number:	Article name	Creation date 16.12.2021 01:57:09 Subject to technical changes	GTIN (EAN)	Packaging unit
2740.2	QI 2 YE		4044211054809	50 ST <sup>11</sup>

1211.5

RK 2,5-4/ZRL BU

## Accessories

### Insulated cross-connector




Insulated cross-connector, No. of poles: 3,  
Mounting type: Can be screwed on, Width:  
16.5 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2741.2	QI 3 YE	4044211054816	50 ST

## Quick marking



Terminal marker / Pocket Maxicard, Length: 5  
mm, Width: 6 mm, Colour: White

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 ST

1211.5

RK 2,5-4/ZRL BU

## Accessories

### Screwdriver



Screwdriver with bare blade, Colour: Black-grey

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 ST

### Test adapters



Test adapter, Length: 37.3 mm, Pitch size: 6 mm, Colour: Beige

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2813.0	TA 6/1/ST	4044211055400	10 ST

1211.5

RK 2,5-4/ZRL BU


---

## Accessories

---

### Insulation plate

---



Insulation plate, Colour: Beige

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2003.2	TRS 1 BG	4044211048068	100

---