

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	8	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	B3	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	B2	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	B1	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

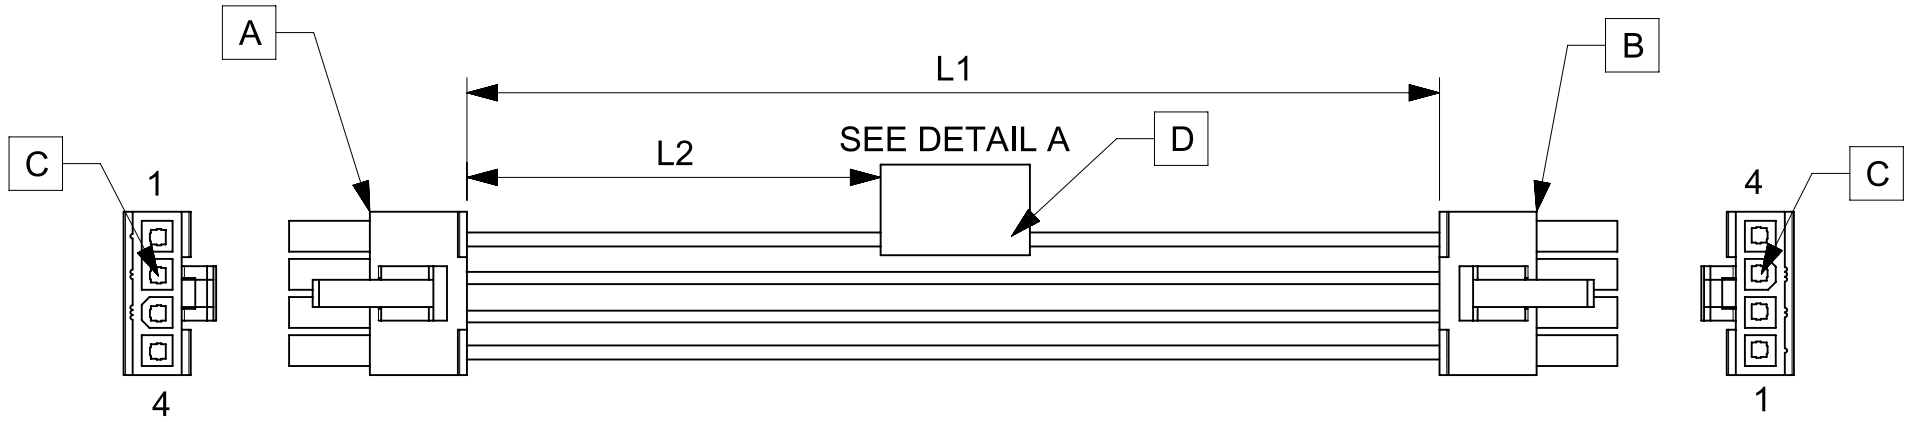


TABLE			
PART NUMBER	L1	L2	TITLE
2153201041	150±8	63 REF	MINIFIT JR SR R-R 4 CIRCUIT 150MM Sn
2153201042	300±10	138 REF	MINIFIT JR SR R-R 4 CIRCUIT 300MM Sn
2153201043	600±10	288 REF	MINIFIT JR SR R-R 4 CIRCUIT 600MM Sn

**NOTES**

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	NTS	ANGULAR TOL ± °		
	4 PLACES ±		EC NO: 638380		
3 PLACES ±		DRWN: AS20 2020/04/06		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2153201041 DOC TYPE: PSD DOC PART: 000 REVISION: A	
2 PLACES ±		CHK'D: RDESAI01 2020/05/28			
1 PLACE ±		APPR: RDESAI01 2020/05/28			
0 PLACES ±		INITIAL REVISION: DRWN: AS20 2020/04/06		MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE		SERIES: 215320