

Ultra-Small Ceramic Power Splitter/Combiner

QCN-12D+

2 Way-90° 50Ω 800 to 1375 MHz



Generic photo used for illustration purposes only
CASE STYLE: FV1206-1

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

Features

- low insertion loss, 0.4 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

Applications

- cellular
- satellite distribution
- GSM
- balanced amplifiers
- modulators

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost
Reel Size Devices/Reel
7" 20, 50, 100, 200, 500, 1000, 3000

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
800-1375									
800-1000	19	14	0.4	0.8	9	12	0.4	0.9	1.3
1000-1375	19	14	0.6	1.0	9	13	0.7	1.0	1.5


1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.30	3.72	0.42	17.70	82.30	1.26	1.31	1.31
810.00	3.33	3.68	0.35	17.77	82.27	1.26	1.31	1.31
830.00	3.35	3.60	0.24	17.90	82.14	1.25	1.31	1.31
870.00	3.46	3.53	0.07	18.29	82.10	1.24	1.30	1.31
900.00	3.52	3.43	0.08	18.58	82.03	1.22	1.29	1.31
930.00	3.54	3.38	0.16	18.85	81.82	1.21	1.29	1.30
960.00	3.63	3.36	0.27	19.22	81.93	1.20	1.28	1.30
990.00	3.63	3.28	0.35	19.52	81.65	1.19	1.28	1.31
1040.00	3.72	3.28	0.44	20.15	81.66	1.17	1.27	1.31
1100.00	3.73	3.26	0.46	20.91	81.43	1.15	1.27	1.32
1160.00	3.69	3.26	0.44	21.62	81.05	1.13	1.27	1.33
1220.00	3.68	3.35	0.33	22.25	81.02	1.12	1.28	1.36
1280.00	3.61	3.53	0.08	22.51	80.98	1.12	1.29	1.39
1340.00	3.45	3.72	0.27	22.12	80.57	1.14	1.31	1.44
1375.00	3.39	3.8	0.42	21.66	80.68	1.17	1.33	1.47

1. Total Loss = Insertion Loss + 3dB splitter loss.


Outline Drawing

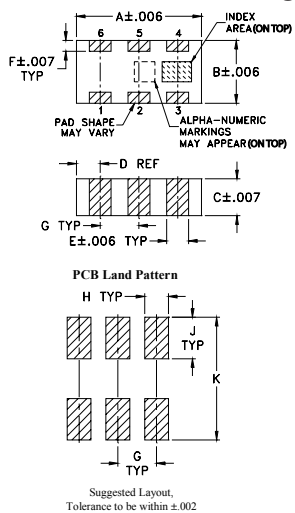

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12		.020

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)



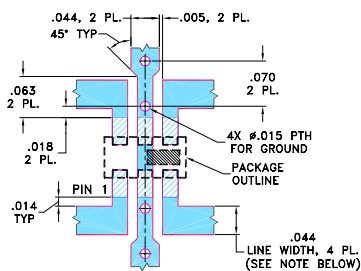


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

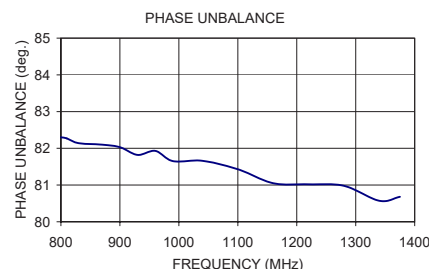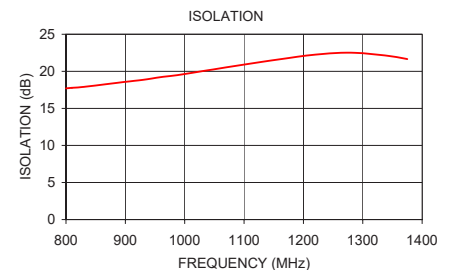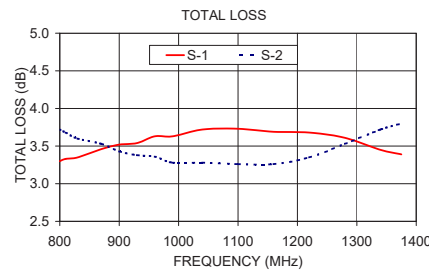

electrical schematic (Note 1)



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. K
M151107
QCN-12D+
ED-10849/2
AD/CP/AM
150923