


## 7.4kW Single-Phase Metered PDU, 230V Outlets (8 C19 and 40 C13), IEC-309 32A Blue Input, 10 ft. Cord, 0U Vertical, TAA, 70 in.

MODEL NUMBER: PDUMV32HV

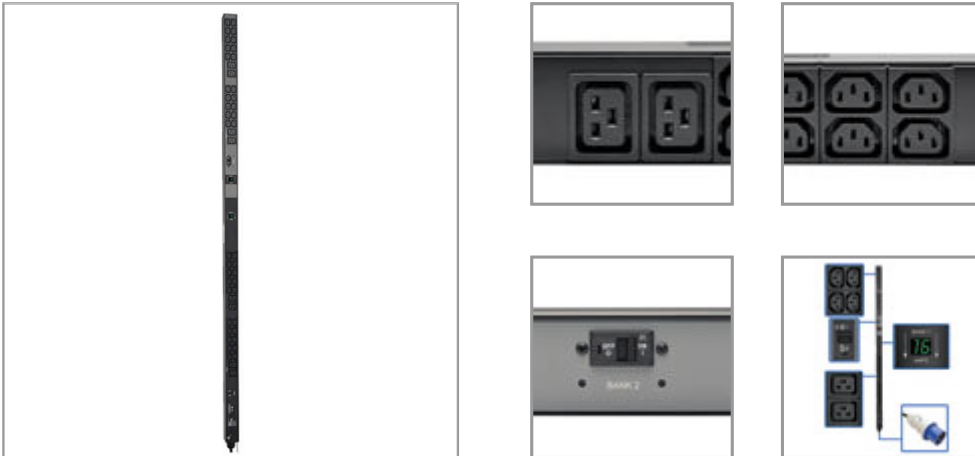

Distributes 32A single-phase AC power to as many as 48 servers, routers, switches and other networking rack equipment. Features digital ammeters for real-time monitoring of load levels to prevent overloads.

### Description

The 70-inch (178-centimeter) PDUMV32HV 32A 230V 7.4kW Single-Phase Metered Power Distribution Unit features 48 outlets for distributing single-phase AC power to rack-mounted equipment, including computers, routers, switches and servers.

Outlets are arranged in two separate load banks, each with 24 outlets (4 C19 and 20 C13), a dedicated 20A circuit breaker and a digital meter that reports the bank's real-time output current in amps. The ammeters let you visually monitor each bank and maintain balanced loads to prevent circuit overloads and downtime due to breakers tripping. Special guards prevent the breakers from tripping accidentally. Outlets, breakers and ammeters are color-coded and labeled for easy identification.

An ideal PDU for server rooms, network closets and data centers, the PDUMV32HV's all-metal housing comes ready to mount vertically in your rack using the preinstalled 9 mm buttons or the included hardware. The IEC-309 32A blue input plug with 10-foot (3-meter) cord connects to your facility's compatible AC power source, generator or protected UPS. Included C20 and C14 plug-lock inserts connect to your components' plugs to ensure they remain connected and continuously powered. Use the included ground screw to connect any equipment that requires a chassis ground.

### Features

#### Digital Meters Help Prevent Overloads

- Dual digital ammeters report real-time output current in amps
- Visual monitoring of PDU load level prevents overloading as more equipment is connected

### Highlights

- Ideal for server rooms, network closets and data centers
- Dual load banks with 24 outlets each (4 C19 and 20 C13)
- Dedicated 20A circuit breakers protect output
- IEC-309 32A blue input plug with 10 ft. (3 m) cord
- Ready for immediate toolless 0U installation

### Package Includes

- PDUMV32HV 32A 230V 7.4kW Single-Phase Metered PDU
- Plug-lock inserts (8 C20, 40 C13)
- Spare installation buttons, 2.9 mm/4.6 mm
- Ground screw
- Mounting hardware
- Owner's Manual



#### Distributes Plenty of Single-Phase Power

- 32A 230V 7.4kW metered PDU
- 48 230V outlets—24 per bank (4 C19 and 20 C13)—distribute single-phase power to connected equipment
- Dual load banks with separate 20A circuit breakers and digital ammeters
- Special guards prevent breakers from accidentally tripping
- Each bank is color-coded and labeled for convenient identification

#### Connects to AC Power Source

- IEC-309 32A blue input plug with 10 ft. (3 m) cord for easy connection to main power source, generator or protected UPS
- Included plug-lock inserts ensure components remain connected and powered
- Included ground screw for equipment requiring chassis ground

#### Easy to Mount With or Without Tools

- Ready for immediate toolless 0U installation using preinstalled 9 mm mounting buttons (spare 2.9 mm and 4.6 mm buttons included)
- Nut-and-bolt vertical installation possible with included mounting hardware
- Use included PDUMVROTATEBRKT mounting accessory for installation with outlets facing rear

#### TAA-Compliant

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332182814
PDU Type	Metered
OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Capacity Details	7.7kW (240V), 7.4kW (230V), 7kW (220V), 6.7kW (208V), 6.4kW (200V) / 32A total capacity; 16A max per breaker outlet bank; 16A max per C19 outlet; 10A max per C13 outlet
Output Receptacles	(40) C13; (8) C19
Output Nominal Voltage	230
Overload Protection	Two 20A circuit breakers protect 24 outlets each
INPUT	
PDU Input Voltage	230



Recommended Electrical Service	32A 230V
Maximum Input Amps	32
PDU Plug Type	IEC-309 32A BLUE (2P+E)
Input Phase	Single-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Supports local monitoring of output current for each output load bank; Outlets, circuit breakers and current meters are color-coded and labeled for easy identification (Black: 20A Bank 1 / Gray: 20A Bank 2)
Front Panel LCD Display	Set of two digital current meters report output current in two segments
Front Panel LEDs	n/a
Switches	n/a
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	75.87 x 9.65 x 6.89
Shipping Dimensions (hwd / cm)	192.71 x 24.51 x 17.50
Shipping Weight (lbs.)	17.60
Shipping Weight (kg)	7.98
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.52
Unit Dimensions (hwd / cm)	177,8 x 6,88 x 6,4
Unit Weight (lbs.)	12.35
Unit Weight (kg)	5.60
Material of Construction	Metal
Form Factors Supported	0u vertical installation in equipment racks, plus under-counter and wallmount
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32 to 122F (0 to 50C)
Storage Temperature Range	5 to 140F (-15 to 60C)
Relative Humidity	5-95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>CERTIFICATIONS</b>	
Certifications	Tested to CE EN 60950-1, CE Class A (Emissions)
<b>WARRANTY</b>	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Product Warranty Period (Worldwide)	2-year limited warranty
--	-------------------------

© 2019 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:  
<https://www.tripplite.com/products/product-certification-agencies>