

# CGA8P3X7T2E105M250KE

TDK Item Description : CGA8P3X7T2E105MT\*\*\*S



Equivalent C4532X7T2E105M for Automotive

## Application & Main Feature

Automotive Grade ( Soft Termination )

## Series

CGA8(4532) [EIA CC1812]



## Dimensions

L	4.50mm +0.5,-0.4mm
W	3.20mm +/-0.4mm
T	2.50mm +/-0.3mm
B	0.20mm Min.
G	

## Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

## Rated Voltage

2E (250Vdc)

## Capacitance

1uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

500Mohm Min.


## AEC-Q200

Yes


## DC Bias Characteristic

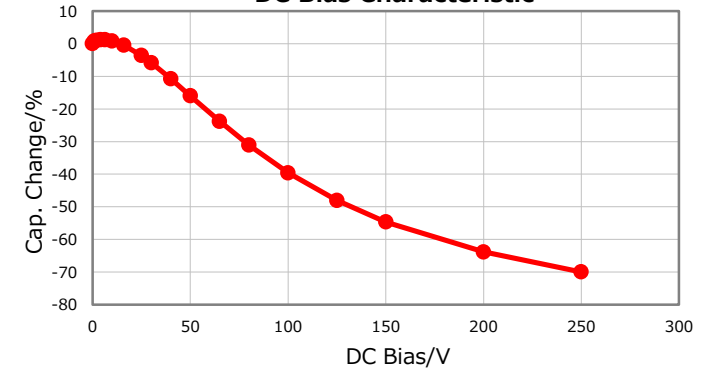


## |Z|, ESR vs. Freq. Characteristics (Simulation Data)

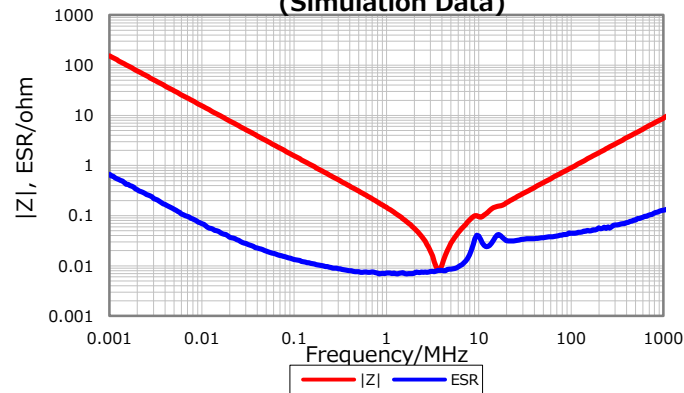


## Temperature Characteristics

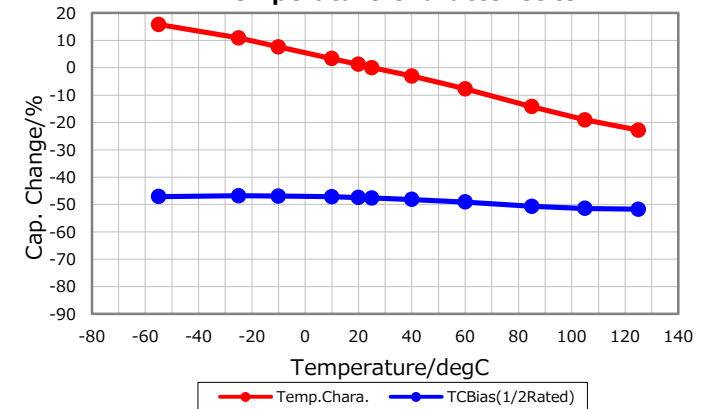

## Cap. vs. Freq. Characteristic

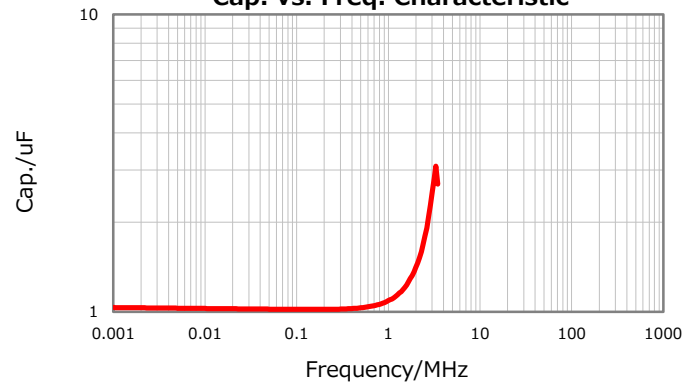

## Ripple Temperature Rise Characteristics

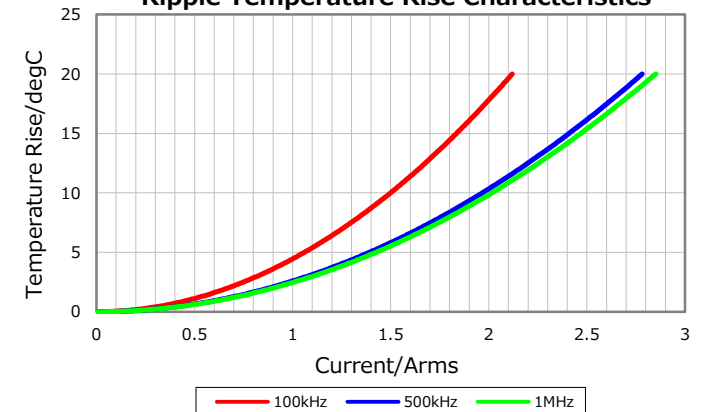

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

March 17, 2017